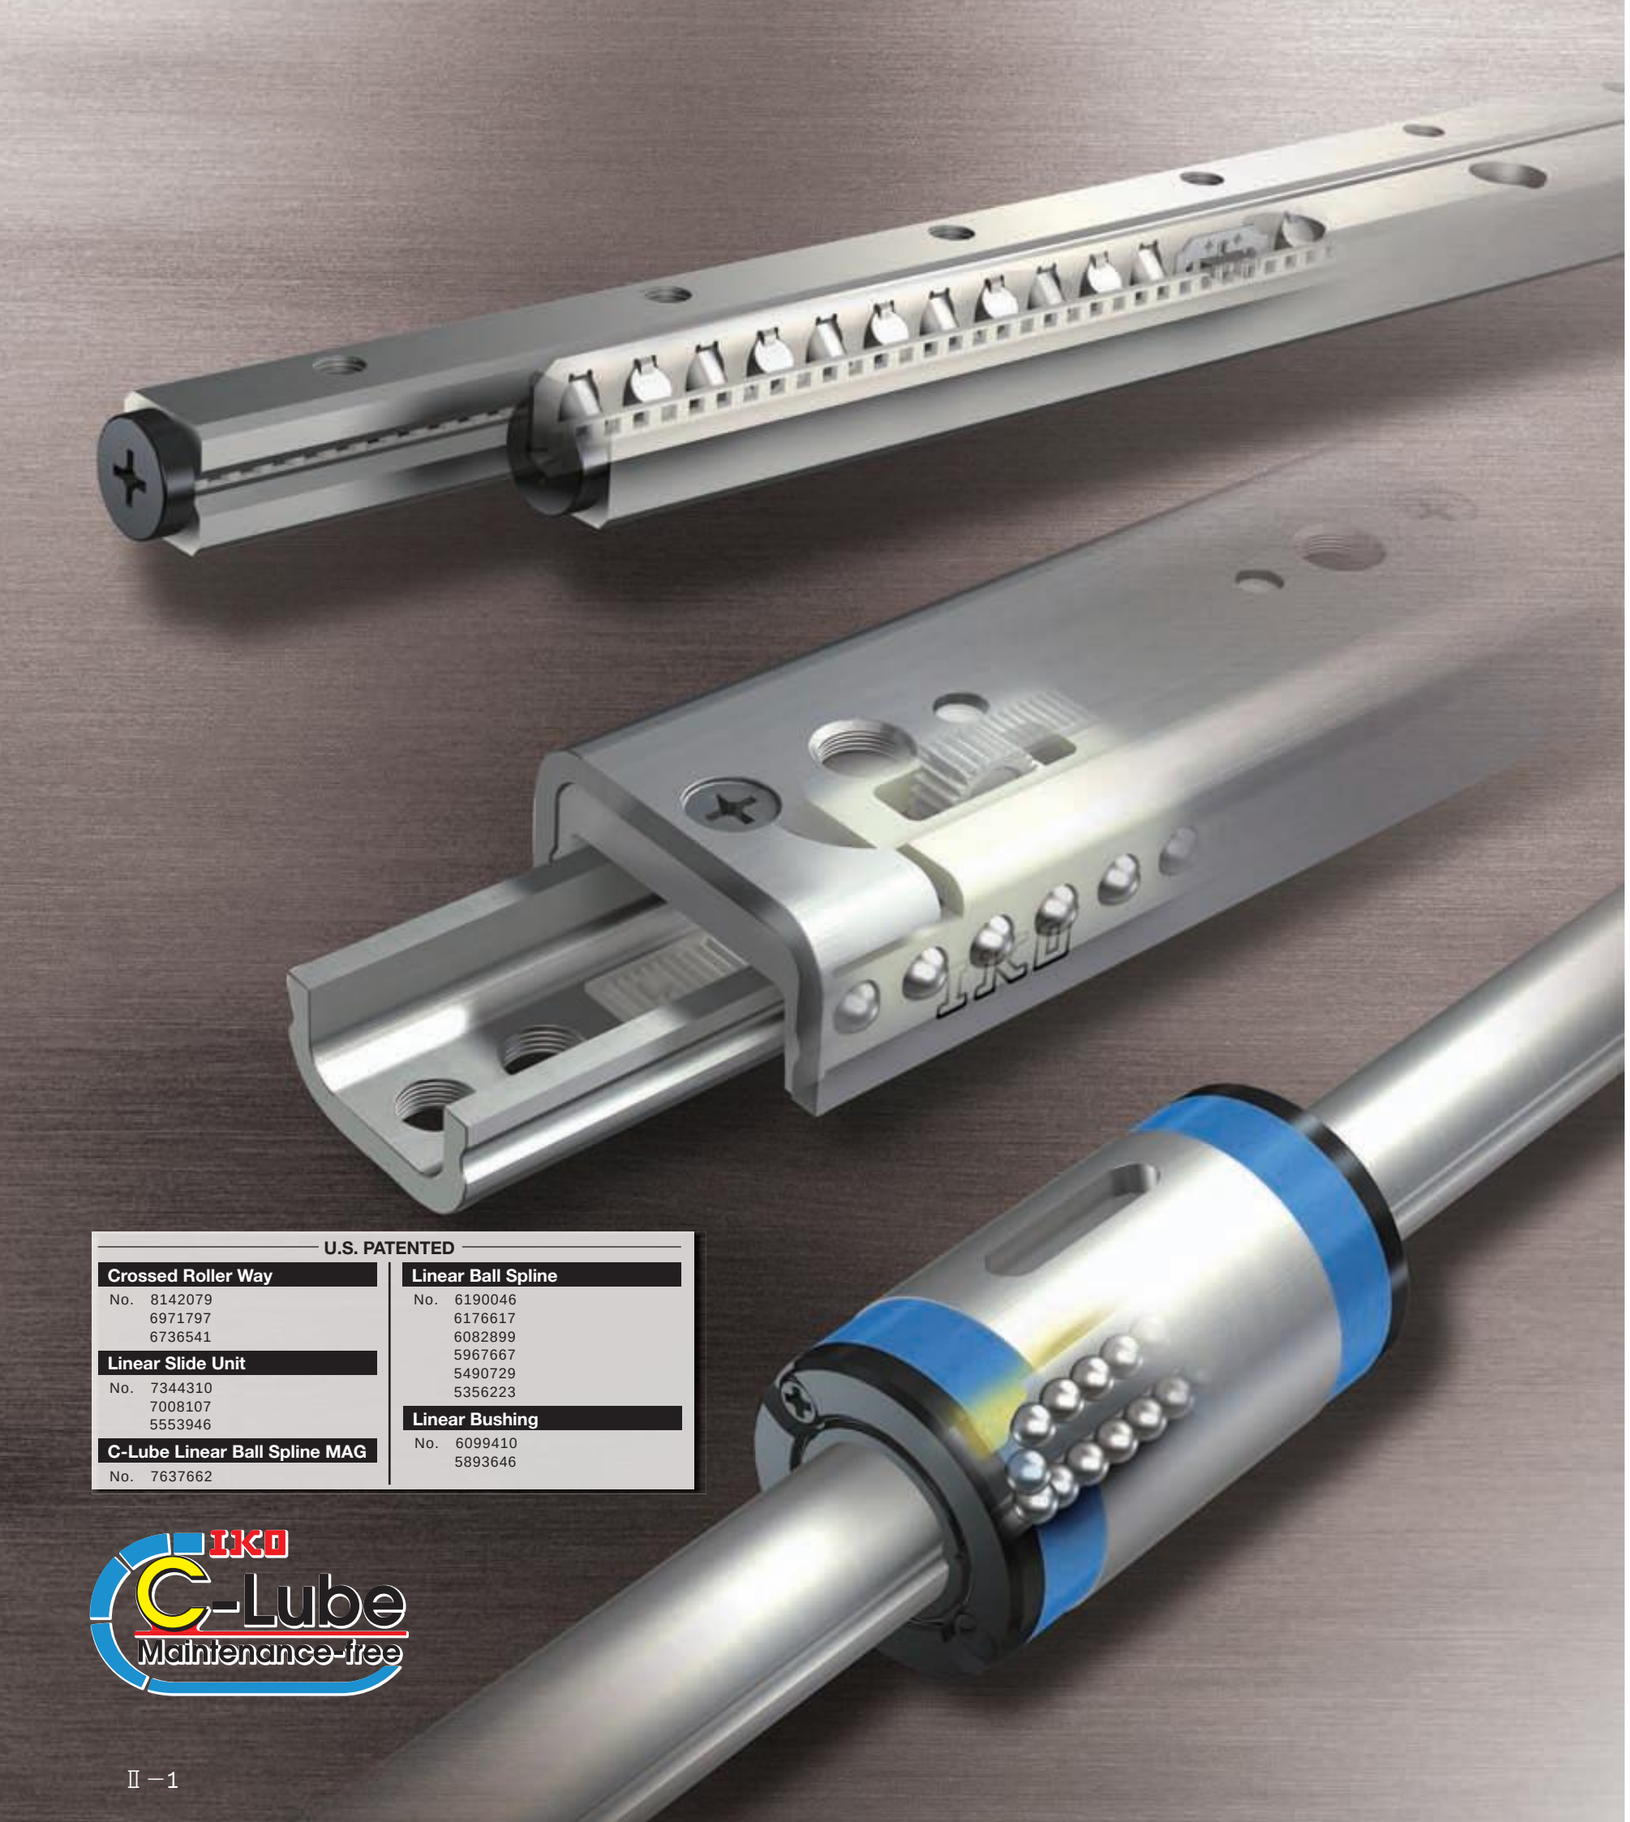


U.S. PATENTED

Crossed Roller Way
No. 8142079
6971797
6736541

Linear Slide Unit
No. 7344310
7008107
5553946

C-Lube Linear Ball Spline MAG
No. 7637662

Linear Ball Spline
No. 6190046
6176617
6082899
5967667
5490729
5356223

Linear Bushing
No. 6099410
5893646

IKO C-Lube Maintenance-free

Explanation and Dimension Table for Respective Product Series

Rail Guide Type

Crossed Roller Way

● Anti-Creep Cage Crossed Roller Way
Anti-Creep Cage Crossed Roller Way H
Crossed Roller Way
Explanation … Ⅱ-7 Dimension Table … Ⅱ-27

● Anti-Creep Cage Crossed Roller Way Unit
Crossed Roller Way Unit
Explanation … Ⅱ-55 Dimension Table … Ⅱ-61

Linear Slide Unit

● High Rigidity Precision Linear Slide Unit
Explanation … Ⅱ-75 Dimension Table … Ⅱ-81

● Precision Linear Slide Unit
Explanation … Ⅱ-83 Dimension Table … Ⅱ-89

● Linear Slide Unit
Explanation … Ⅱ-95 Dimension Table … Ⅱ-99

Round Shaft Guide Type

Linear Ball Spline

● C-Lube Linear Ball Spline MAG
Linear Ball Spline G
Explanation … Ⅱ-107 Dimension Table … Ⅱ-123

● Block Type Linear Ball Spline
Explanation … Ⅱ-131 Dimension Table … Ⅱ-141

● Stroke Ball Spline
Explanation … Ⅱ-143 Dimension Table … Ⅱ-149

Linear Bushing

● Linear Bushing G
Explanation … Ⅱ-153 Dimension Table … Ⅱ-159

● Linear Bushing
Explanation … Ⅱ-161 Dimension Table … Ⅱ-167

● Miniature Linear Bushing
Explanation … Ⅱ-189 Dimension Table … Ⅱ-192

Stroke Rotary Bushing

● Stroke Rotary Bushing
Explanation … Ⅱ-195 Dimension Table … Ⅱ-199

● Miniature Stroke Rotary Bushing
Explanation … Ⅱ-203 Dimension Table … Ⅱ-207

● Stroke Rotary Cage
Explanation … Ⅱ-209 Dimension Table … Ⅱ-212

Flat Guide Type

● Roller Way
Explanation … Ⅱ-215 Dimension Table … Ⅱ-221

● Flat Roller Cage
Explanation … Ⅱ-225 Dimension Table … Ⅱ-231

[Related Products]

● Cam Follower ····· Ⅱ-235
● Roller Follower ····· Ⅱ-291

General Explanation

● General Explanation ····· Ⅲ-2

Introduction of Application Examples

● Introduction of Application Examples ····· Ⅳ-2

Crossed Roller Way

Anti-Creep Cage Crossed Roller Way
Anti-Creep Cage Crossed Roller Way H
Crossed Roller Way
Anti-Creep Cage Crossed Roller Way Unit
Crossed Roller Way Unit

A wide variety of series products including mechanism are available! Features of cage misalignment prevention Crossed Roller Way

IKO Crossed Roller Way is a linear motion rolling guide incorporating a roller cage between two ways whose two V-shaped surfaces are used as track groove. Arrangement of cylindrical rollers by orthogonalizing them alternately allows receiving of loads in any direction and executes extremely high-accuracy and smooth linear motion.

Crossed Roller Way
CRW·CRWM




Crossed Roller Way Unit
CRWU



Anti-Creep Cage Crossed Roller Way
CRWG

Anti-Creep Cage Crossed Roller Way H
CRWG···H


IKO Anti-Creep Cage Crossed Roller Way CRWG is a product with a cage creep IKO proof function using a rack and pinion mechanism originated from the Crossed Roller Way CRW featuring smooth linear motion with super high accuracy.
CRWG ··· H is high load capacity type of CRWG, which has achieved greatly increased load rating by redesigning of raceway of CRWG.

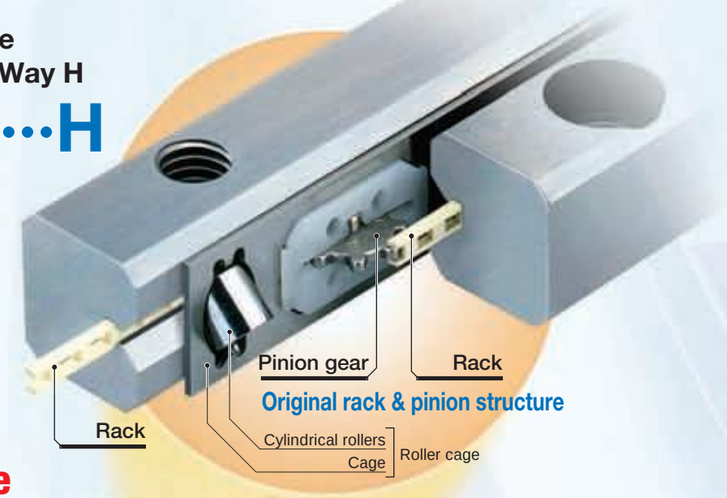

Built-in rack & pinion type
Solves cage creep issue!!

Anti-Creep Cage Crossed Roller Way Unit
CRWUG

IKO Anti-Creep Cage Crossed Roller Way Unit CRWUG is a product with a cage creep proof function-provided Crossed Roller Way CRWG mounted into a ground-finished rigid table and bed.

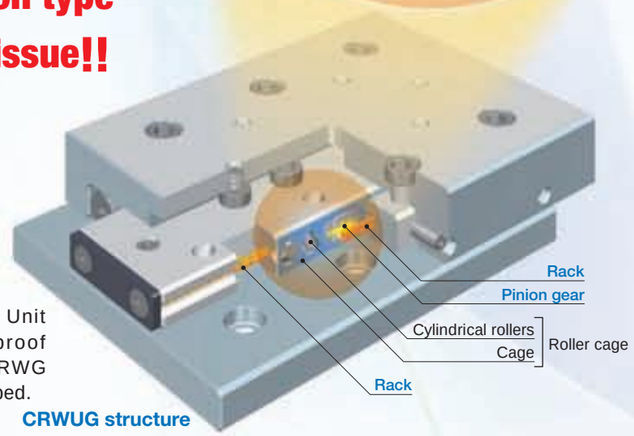

CRWUG structure

Features of Built-in Rack & Pinion Type

Solves Cage Creep Issue!

Perfect solution for cage creep issues by a built-in rack and pinion mechanism as an original design.

Freedom in Mounting
This series is reliable for applications such as vertical axis where Crossed Roller Way may have chances of cage creep.


High-Speed and High-Tact Operation
Any corrective operation for cage creep is not necessary even for high velocity operation.

Saving Energy
No remedy motion of cage is necessary even in long term operation.

No cage creep even under high-tact operation in vertical axis!

《Durability test》 Test conditions

Model number	CRWG3	
Test method	Vibration test machine	
Condition	Posture	Vertical
	Maximum velocity	827 mm/s
	Acceleration	15 G
	Number of cycle	31 Hz
	Stroke length	8 mm
	Mass of moving part	330 g
Total cycles	100,000,000 cycles	




《Result》 No cage creep nor material damage in any component is found.

Interchangeable in Mounting Dimensions!

Adoption of original structure of arranging a rack inside the way keeps the same mounting dimensions as conventional Crossed Roller Way CRW.

Easy Replacement
Since they have the same external dimensions to those of the existing Crossed Roller Way and Crossed Roller Way Unit, existing Crossed Roller Way and Crossed Roller Way Unit can be replaced without any mounting dimensions modification.

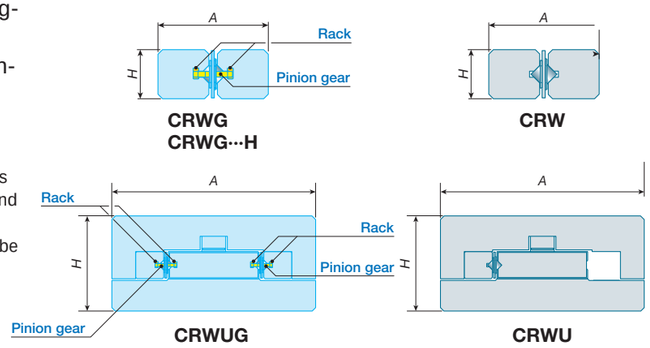

Smooth and Extremely-High Accurate Operation!

Combination of precisely finished raceways and non-recirculating type linear motion rolling guide with super high precision rollers provides superbly smooth motion with very high accuracy.

Improved Running Accuracy
Extremely high running accuracy can be achieved without run deflection by recirculating type linear motion rolling guide.

Suitable for Micro-Feeding
Improvement of precision positioning accuracy and superior corresponding feature to micro-feeding command can be expected because of the linear motion without stick-slip by extremely small frictional resistance.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Anti-Creep Cage
Crossed Roller Way

CRWG



Anti-Creep Cage
Crossed Roller Way H

CRWG···H

Crossed Roller Way

CRW/CRWM

Points

Superior load balance

1 This unit has a roller cage with cylindrical rollers alternately orthogonalized between two ways whose two V-shaped surfaces are used as track groove, which allows receiving of loads in any direction.

Solves cage creep problem

2 CRWG and CRWG···H units, which have originally-designed rack and pinion mechanism built-in, solve the cage creep issue and support high-speed & high-tact operation and vertical axis application.

High load capacity type CRWG···H

3 CRWG···H has achieved greatly increased load rating by redesigning of raceway of CRWG, thereby downsizing the machine and equipment and prolonging their lifetime.

Standard type and module type

4 There are two types in the CRW: one is standard type of using four ways and two roller cages in combination as a set and the other is module type of integrating two internal ways in a single structure.

Easy mounting

5 The mounting holes of the way are provided with boring and female thread, so that the mounting structure is not restricted. The module type with two internal ways integrated in a single structure is simple in mounting structure, thus producing high accuracy linear motion.

Stainless steels superior in corrosion resistance are listed on lineup.

6 Products made of stainless steel are highly resistance to corrosion, so that they are suitable for applications where rust prevention oil is not preferred, such as in a cleanroom environment.

Identification Number and Specification

Example of an identification number

The specifications of CRWG series, CRWG···H series, and CRW series are indicated by the identification number. Indicate the identification number, consisting of a model code, a dimension, a part code, a material code, a classification symbol, and a supplemental code for each specification to apply.

		1	2	3	1	4	5	6	7
CRWG series CRWG···H series		CRWG	3	– 150	H			SP	/B
CRW series	Standard type	CRW	3	– 150		C20	SL	SP	/U
		CRW	3	– 250×300		C36	SL	SP	/U
	Module type	CRWM	3	– 150		C20		SP	/U
		CRWM	3	– 250×150		C20		SP	/U

1 **Model** — Model code Page Ⅱ－9

2 **Size** — Dimensions Page Ⅱ－9

3 **Way length** — Part code Page Ⅱ－10

4 **Number of cylindrical rollers** — Part code Page Ⅱ－10

5 **Material type** — Material code Page Ⅱ－10

6 **Accuracy class** — Classification symbol Page Ⅱ－11

7 **Special specification** — Supplemental code Page Ⅱ－11

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Details of Identification Number and Specification —Model・Size—

1 Model




Anti-Creep Cage Crossed Roller Way (CRWG series)		: CRWG
Anti-Creep Cage Crossed Roller Way H (CRWG···H series)		: CRWG···H
Crossed Roller Way (CRW series)	Standard type	: CRW
	Module type	: CRWM

For applicable models and sizes, see Fig. 1.

2 Size

1, 2, 3, 4, 6, 9, 12, 15, 18, 24 For applicable models and sizes, see Fig. 1.

Table 1 Models and Sizes of CRWG series, CRWG···H series, and CRW series

Series	Shape	Material	Model	Size									
				1	2	3	4	6	9	12	15	18	24
CRWG		High carbon steel made	CRWG	–	○	○	○	○	–	–	–	–	–
CRWG···H		High carbon steel made	CRWG···H	–	○	○	○	–	–	–	–	–	–
CRW	Standard type 	High carbon steel made	CRW	○	○	○	○	○	○	○	○	○	○
		Stainless steel made	CRW···SL	○	○	○	○	○	–	–	–	–	–
	Module type 	High carbon steel made	CRWM	○	○	○	○	–	–	–	–	–	–

—Way length・Number of Cylindrical Rollers・Material Type—

3 Way length

○
○×○


The way length is indicated in mm. The CRW series can be combined with a way of different length. For details of way length, see the dimension tables on pages Ⅱ-27 to Ⅱ-54.

Specifying the combination of different way lengths

Combination of standard type

This combination consists of two short ways, two long ways, and two roller cages, as a set.
The number of rollers incorporated into a roller cage shall be standard number of short ways (number described in the dimension table) but the number of rollers may be specified.


Example CRW 6 – 300 × 400 C24
- The number of cylindrical rollers to be incorporated in a unit: 24
- Length of long way: 400 mm
- Length of short way: 300 mm



Combination of module type

This combination consists of one center way, two ways, and two roller cages, as a set.
The number of rollers incorporated into a roller cage shall be standard number of short ways (number described in the dimension table) but the number of rollers may be specified.

Example CRWM 3 – 200 × 150 C20
- The number of cylindrical rollers to be incorporated in a unit: 20
- Length of outside way: 150 mm
- Length of center way: 200 mm



4 Number of cylindrical rollers

: No symbol
: C○

This represents the number of cylindrical rollers incorporated into a CRW series cage. If not directed, the number of cylindrical rollers indicated in the dimension table shall be incorporated in a roller cage.


5 Material type

High carbon steel made	: No symbol	For applicable models and sizes, see Fig. 1.
Stainless steel made	: SL	

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

6 Accuracy class

Standard	: No symbol	For parallelism of the raceway to reference mounting surface and the tolerance of the parallelism of two raceways of CRWM, see Fig. 1.
Super precision	: SP	

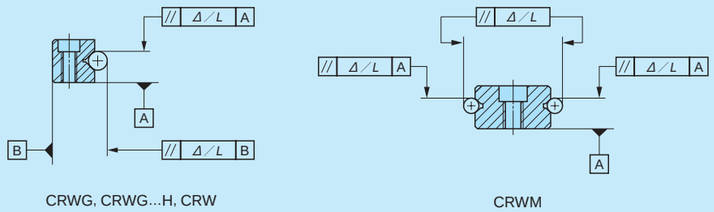

CRWG, CRWG…H, CRW

CRWM

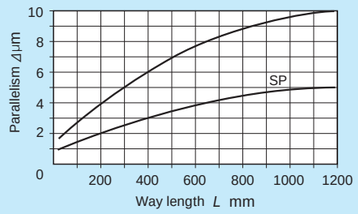


Fig. 1 Accuracy

7 Special specification

B, M, SA, SB, U		For applicable special specifications, see Table 2. For combination of multiple special specifications, see Table 3. For details of special specifications, see pages Ⅱ-12 to Ⅱ-14.

Table 2 Application of special specifications

Special specification	Supplemental code	Size									
		1	2	3	4	6	9	12	15	18	24
Special mounting screw	/B	–	–	○	○	○	○	○	○	○	○
High rigidity roller cage (1) (2)	/M	–	–	–	–	○	○	○	○	○	○
End stopper SA (2)	/SA	–	○	○	○	○	○	○	○	○	○
End stopper SB (2)	/SB	–	○	○	○	○	○	○	○	○	○
Wiper seal (2)	/U	–	○	○	○	○	○	○	○	○	○

Notes (1) Not applicable to module type.
(2) Not applicable to CRWG series and CRWG…H series.

Table 3 Combination of special specifications


M	○			
SA	○	○		
SB	○	○	–	
U	○	○	–	–
	B	M	SA	SB

Remarks 1. The combination of "-" shown in the table is not available.
2. When using multiple types for combination, please indicate by arranging the symbols in alphabetical order.

Special mounting screw /B

Preload adjusting-side way can be moved by adjusting the preload. Allowance for movement is required between a way fixing screw and mounting hole, but special mounting screws are provided for the cases where enough allowance is not provided or a fixing screw should be mounted from the way side as shown in Fig. 2.
This special mounting screw can also be used for the case where the mounting hole for mounting the fixed-side way and positioning accuracy of female thread are not enough. This special mounting screw is high carbon steel-made only.

Table 4 Dimensions of special mounting screw



unit: mm

Size	Bolt size	*d*	*D*	*H*	*L*	*S*
3	M 3	2.3	5	3	12	5
4	M 4	3.1	6	4	15	6
6	M 5	3.9	8	5	20	8
9	M 6	4.6	8.5	6	30	12
12	M 8	6.2	11.5	8	40	17
15	M10	7.9	14	10	45	16
18	M12	9.6	16	12	50	19
24	M14	11.2	19.5	14	70	26





Fig. 2 Mounting by special mounting screw

High rigidity roller cage /M




The cage is changed into a high rigidity copper alloy-made cage designed to suit vertical axis application. This cage has a structure to prevent a roller from dropping off in one-side direction.
For using a high rigidity roller cage for vertical axis application, it is recommended to use the cage in combination with end stopper SB.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

End stopper SA /SA

When the stroke frequency is high and cage creep may be caused by the vibration and non-uniformly varying load, the end screw is changed into end stopper SA.
For the series of size 1, an end stopper SA according to end stopper SA is included as standard.

Table 5 Dimensions of end stopper SA



unit: mm


Size	t_1	t_2
2	4.5	2
3	5	2
4	7	3
6	8	3
9	10	4

Size	t_1	t_2
12	11	5
15	14	6
18	14	6
24	16	6

End stopper SB /SB

When using a high rigidity roller cage for vertical axis application, the end screw is changed into end stopper SB to regulate the cage stroke at the end.
The end stopper SB cannot be mounted on all way ends. Standard mounting positions are shown in Fig. 3. The mounting positions can be changed by loosening the screw.

Table 6 Dimensions of end stopper SB



unit: mm

Size	t_1	t_2
2	4.5	2
3	5	2
4	7	3
6	8	3
9	10	4

Size	t_1	t_2
12	11	5
15	14	6
18	14	6
24	16	6


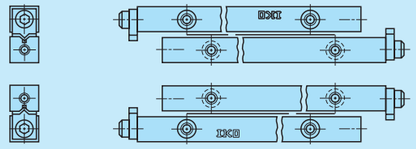


Fig. 3 Arrangement of end stopper SB

Wiper seal /U

In order to prevent foreign substances from entering into a raceway, the wiper seal is changed into the one with a function of end stopper SB.
The wiper seal cannot be mounted on all way ends. Standard mounting positions are shown in Fig. 4. The mounting positions can be changed by loosening the screw.

Table 7 Dimensions of wiper seal



unit: mm

Size	t_1	t_2
2	4.5	4
3	5	4
4	7	6
6	8	6
9	10	7.5

Size	t_1	t_2
12	11	8.5
15	14	11
18	14	11
24	16	11

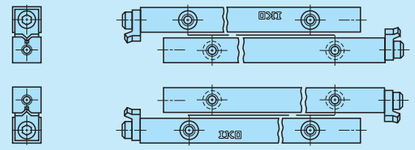


Fig. 4 Arrangement of wiper seal

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Load Rating and Allowable Load

Basic dynamic load rating C, basic static load rating C_0, and allowable load F of the CRWG series and CRWG···H series show values for downward loads in case of parallel arrangement of four ways and two pairs of roller cages as one set. (Refer to Fig. 5) In addition, the upward and lateral load rating is the same as downward load rating.

For the CRW series, since the number of cylindrical rollers that share load of each direction varies, the load rating for each load direction and allowable load must be obtained. In addition, basic dynamic load rating C_U, basic static load rating C_{0U}, and allowable load F_U in the dimension table show values per cylindrical roller.

Basic dynamic load rating C, basic static load rating C_0, and allowable load F of the CRW series are obtained based on the equation indicated in Table 8.1 and Table 8.2.

For more information on the definition of load rating and calculated load, see page Ⅲ-3.






Fig. 5 Direction of load rating of the CRWG series and CRWG···H series

Allowable load

Allowable load refers to load of smooth rolling motion on contact surface to which maximum contact stress is applied and the sum of whose elastic deformation of rolling elements and raceway is small.


Therefore, use applied load within the allowable load range if very smooth rolling motion and high accuracy are required.

Table 8.1 Calculating formula of load rating and allowable load of standard type CRW series

	Upward and downward load (1)	Lateral load
Load direction		
Basic dynamic load rating C N	$C_r=\left\{\left(\frac{Z}{2}-1\right)2p\right\}^{1/36}\left(\frac{Z}{2}\right)^{3/4}C_U$ ·····(1)	$C_a=\left\{\left(\frac{Z}{2}-1\right)2p\right\}^{1/36}\left(\frac{Z}{2}\right)^{3/4}2^{7/9}C_U$ ·····(4)
Basic static load rating C_0 N	$C_{0r}=\left(\frac{Z}{2}\right)C_{0U}$ ·····(2)	$C_{0a}=2\left(\frac{Z}{2}\right)C_{0U}$ ·····(5)
Allowable load F N	$F_r=\left(\frac{Z}{2}\right)F_U$ ·····(3)	$F_a=2\left(\frac{Z}{2}\right)F_U$ ·····(6)
Code description	C_r : Basic dynamic load rating in case upward and downward load is applied N	
	C_a : Basic dynamic load rating in case lateral load is applied N	
	C_{0r} : Basic static load rating in case upward and downward load is applied N	
	C_{0a} : Basic static load rating in case lateral load is applied N	
	F_r : Allowable load in case upward and downward load is applied N	
	F_a : Allowable load in case lateral load is applied N	
	Z : The number of cylindrical rollers incorporated in a roller cage (omit the figures after the decimal fractions for $\frac{Z}{2}$)	
	p : Inter-pitch dimensions of cylindrical rollers mm	
	C_U : Basic dynamic load rating per cylindrical roller N	
	C_{0U} : Basic static load rating per cylindrical roller N	
	F_U : Allowable load per cylindrical roller N	

Note (1) : In case of parallel arrangement in this load direction, calculation must be performed based on the equations (7) , (8) , and (9) in Table 8.2.

Table 8.2 Calculating formula of load rating and allowable load of module type CRW series

	Upward and downward load	Lateral load
Load direction		
Basic dynamic load rating C N	$C_r=\left\{\left(\frac{Z}{2}-1\right)2p\right\}^{1/36}\left(\frac{Z}{2}\right)^{3/4}2^{7/9}C_U$ ·····(7)	$C_a=\left\{\left(\frac{Z}{2}-1\right)2p\right\}^{1/36}\left(\frac{Z}{2}\right)^{3/4}2^{7/9}C_U$ ·····(10)
Basic static load rating C_0 N	$C_{0r}=2\left(\frac{Z}{2}\right)C_{0U}$ ·····(8)	$C_{0a}=2\left(\frac{Z}{2}\right)C_{0U}$ ·····(11)
Allowable load F N	$F_r=2\left(\frac{Z}{2}\right)F_U$ ·····(9)	$F_a=2\left(\frac{Z}{2}\right)F_U$ ·····(12)
Code description	C_r : Basic dynamic load rating in case upward and downward load is applied N	
	C_a : Basic dynamic load rating in case lateral load is applied N	
	C_{0r} : Basic static load rating in case upward and downward load is applied N	
	C_{0a} : Basic static load rating in case lateral load is applied N	
	F_r : Allowable load in case upward and downward load is applied N	
	F_a : Allowable load in case lateral load is applied N	
	Z : The number of cylindrical rollers incorporated in a roller cage (omit the figures after the decimal fractions for $\frac{Z}{2}$)	
	p : Inter-pitch dimensions of cylindrical rollers mm	
	C_U : Basic dynamic load rating per cylindrical roller N	
	C_{0U} : Basic static load rating per cylindrical roller N	
	F_U : Allowable load per cylindrical roller N	

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Selection of CRW Series

For selection of CRW series specifications, stroke length and the number of cylindrical rollers, as well as accuracy, load rating and allowable load, must be determined.

Stroke length and the number of cylindrical rollers


Stroke length of the CRW series affects the way length and the number of cylindrical rollers.
Therefore, select specifications by following the procedure below taking into account the stroke length used and applied load.

❶ Calculation of way length

The way length, which should be 1.5 times longer than the stroke length used, is obtained from the equation below.

$$L \geqq 1.5S \quad \cdots\cdots (13)$$

Where L: Way length mm
S: Stroke length used mm



❷ Calculation of maximum stroke length

Ideally the stroke length used should be less than 80% of the maximum stroke length, which is obtained from the equation below.

$$S_1 \geqq \frac{1}{0.8} S \quad \cdots\cdots (14)$$

Where S_1: Maximum stroke length mm
S: Stroke length used mm


❸ Calculation of cage length and the number of rollers

With the way length and maximum stroke length determined, the allowable length for cage can be calculated.
Calculation method of the cage length varies depending on specifications of end screws and end stopper fitted to the way end.

(1) With standard end screws and end stopper SA (excluding Size 1 series)
The dimensions between rollers at both ends is obtained from the following equation by using a value obtained by subtracting a half of the maximum stroke length from the way length.

$$L_R = L - \frac{S_1}{2} \quad \cdots\cdots (15)$$

Where L_R : Allowable dimensions between rollers at both ends mm
L : Way length mm
S_1 : Maximum stroke length mm



The number of rollers to be incorporated in a roller cage is obtained by the following equation.


$$Z = \frac{L_R - D_W}{p} + 1 \quad \cdots\cdots (16)$$

Where Z : Number of cylindrical rollers (figures after the decimal fractions are omitted)
L_R : Allowed dimensions between rollers at both ends mm
D_W: Diameter of cylindrical rollers (refer to the dimension table) mm
p : Inter-pitch dimensions of cylindrical rollers (refer to the dimension table) mm

(2) For Size 1 series
The stroke length is regulated by cage and end stopper and the cage length is obtained by the following equation.

$$R = L - \frac{S_1}{2} \quad \cdots\cdots (17)$$

Where R: Allowable cage length mm
L: Way length mm
S_1: Maximum stroke length mm



The number of rollers to be incorporated in a roller cage is obtained by the following equation.


$$Z = \frac{R - 2e}{p} + 1 \quad \cdots\cdots (18)$$

Where Z : Number of cylindrical rollers (figures after the decimal fractions are omitted)
R: Allowable cage length mm
e : End dimension of cage (refer to the dimension table) mm
p: Inter-pitch dimensions of cylindrical rollers (refer to the dimension table) mm

(3) For end stopper SB and wiper seal
The stroke length is regulated by cage and end stopper or wiper seal and the cage length is obtained by the following equation.

$$R = L - t_2 - S_1 \quad \cdots\cdots (19)$$

Where R : Allowable cage length mm
L : Way length mm
S_1: Maximum stroke length mm
t_2 : Thickness of end stopper SB or wiper seal mm (See Table 6 in page Ⅱ-13, and Table 7 in page Ⅱ-14)



The number of rollers to be incorporated in a roller cage is obtained by the equation (18) as with the Size 1 series.

Calculation examples

Form of use ····· CRW 6
Applied load ····· P = 7000 N
Stroke length ····· S = 195 mm

Select specifications for parallel use of Crossed Roller Way under the above conditions (refer to Fig. 26 in page Ⅱ-23).

❶ Calculation of way length

The way length L is calculated from the equation (13).

$$L \geqq 1.5S = 1.5 \times 195 = 292.5$$

Therefore, select L = 300 mm based on the standard length in the dimension table.

❷ Calculation of maximum stroke length

The maximum stroke length S_1 is calculated from the equation (14).

$$S_1 \geqq \frac{1}{0.8} \quad S = \frac{1}{0.8} \times 195 \fallingdotseq 244$$

Allowable dimensions between rollers at both ends L_R is calculated from the equation (15).

$$L_R = L - \frac{S_1}{2} = 300 - \frac{244}{2} = 178$$

❸ Calculation of the number of rollers

The number of cylindrical rollers Z is calculated from the equation (16). However, D_W and p in this form are D_W = 6 mm、p = 9 mm according to the dimension table.

$$Z = \frac{L_R - D_W}{p} + 1 = \frac{178 - 6}{9} + 1 \fallingdotseq 20.1$$

Therefore, it should be Z = 20 by omitting figures after the decimal fractions.

❹ Calculation of allowable load

Allowable load in parallel arrangement F is calculated from equation (9) described in Table 8.2 in page Ⅱ-16. However, allowable load per cylindrical roller F_U is F_U = 769 N according to the dimension table.

$$F = 2\left(\frac{Z}{2}\right) F_U = 2\left(\frac{20}{2}\right) \times 769 = 15380$$

Therefore, allowable load F is larger than applied load P = 7000 N. When allowable load becomes smaller than applied load, it is necessary to increase the number of cylindrical rollers by extending way length, or increase the cylindrical roller diameter.

❺ Determination of specifications

Specifications obtained in accordance with the above is CRW6-300 and the number of cylindrical rollers is 20.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Lubrication

Grease is not pre-packed in the CRWG series, CRWG···H series and CRW series, so please perform adequate lubrication as needed.
Both of oil lubrication and grease lubrication are available in the CRWG series, CRWG···H series and CRW series. Generally, oil lubrication should be selected for high speed or low frictional resistance, and grease lubrication for low speed.
For grease lubrication, use of high-quality lithium-soap base grease is recommended. For light load and low speed, apply grease or oil to raceway, rack and pinion gear first and then reapply accordingly. However, the structure as indicated in the Fig. 6 allows for easy reapplication. In addition, since the clearance between ways is small for CRWG···H series, apply grease or oil directly to raceway for re-greasing.




Fig. 6 Example of lubrication system

Dust Protection

Since the CRWG series, CRWG···H series and CRW series are finished with high accuracy, harmful foreign substances such as dust and particles entering into the bearing will cause low life or impaired accuracy. To prevent harmful foreign substances such as dust, particles and water from outside from entering, it is recommended to attach non-contact type labyrinth seal as indicated in Fig. 7, or contact type wiper seal as indicated in the Fig. 8 to both sides.




Fig. 7 Example of labyrinth seal




Fig. 8 Example of wiper seal

Precaution for Use

❶ Handling

As the CRWG series, CRWG···H series and CRW series are designed highly precisely, take extra care for handling.
A pinion gear and cylindrical roller are incorporated with the cage for the CRWG series and CRWG···H series. When the cage is dropped or handled roughly, the pinion gear and cylindrical roller may come off. Especially for CRWG···H, grabbing the cylindrical roller may take it off, so be sure to hold the cage body for handling. In addition, do not cut off the cage as doing so may cause pinion gear coming off and breakage of gear joint section.
A rack is incorporated with the way for the CRWG series and CRWG···H series. In operation, take note that the rack may come off when the end screw is removed.
Though the cage for the CRW series may cut off to necessary length, handle it with care not to deform it when cutting.

❷ Accuracy of mounting part

Examples of typical mounting surface processing are shown in Fig. 9.1 and Fig. 9.2.
General processing accuracy of mounting surface is according to Table 9. However, care should be exercised as mounting surface accuracy directly affects running accuracy. Especially when high running accuracy is required, the processing accuracy higher than that indicated in Table 9 is required.




Fig. 9.1 Example of processing of CRWG, CRWG···H and CRW mounting surface




Fig. 9.2 Example of processing of CRWM mounting surface

Table 9 Accuracy of mounting part

Accuracy of A surface	· Directly affects running accuracy. For the flatness of two mounting surfaces on table and bed sides, allowable value approximate to the parallelism indicated in Fig. 1 in page Ⅱ-11 is recommended.
Accuracy of B and C surfaces	· Flatness Affects preload (refer to ❹ Preload adjustment mechanism). Ⅱ−11Allowable value approximate to the parallelism indicated in Fig. 1 in page Ⅱ-11 is recommended. · Squareness Affects rigidity in preload direction of the mounting part of the CRWG series, CRWG···H series and CRW series. Process to sufficiently high accuracy.

❸ Shape of mounting part

For the opposite corner of the mating reference mounting, it is recommended to have relieved fillet as indicated in Fig. 10.
In addition, a clearance of 0.5 mm or higher should be made between the way and the mating member material.

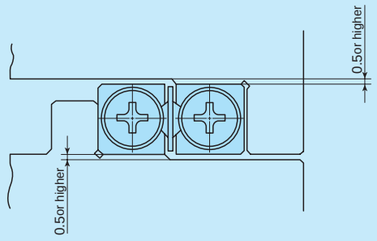


Fig. 10 Shape of mounting part

❹ Preload adjustment mechanism

For use with preload, use the preload adjusting screw as indicated in Fig. 11 as a general way. Preload adjusting screw nominal dimensions and mounting position should be in accordance with the way fixing bolt dimensions and position. Press the center of the way H dimensions.
Preload amount varies depending on operational conditions of your machine and device. However, as excessive preload may lead to short life and damage on the raceway, it is typically ideal to adjust to zero clearance or slight preload state. When accuracy and rigidity are required, use a push plate or tapered jib as indicated in Fig. 12 and Fig. 13, respectively.




Fig. 11 Example of typical preload adjustment




Fig. 12 Example of push plate




Fig. 13 Example of tapered jib

❺ Maximum operating temperature

As synthetic resin components are used for the CRWG series and CRWG···H series, the maximum operating temperature is 120°C, while it should be lower than 100°C for continuous use. When it exceeds 100°C, contact IKO.
As synthetic resin components are not used for the CRW series, it may be used at high temperature. However, when it exceeds 100°C, contact IKO.

❻ Maximum velocity

Operating velocity should be lower than 50 m/min for the CRWG series and CRWG···H series, and lower than 30 m/min for the CRW series.

❼ Tightening torque for fixing screw

Typical tightening torque for mounting of the CRWG series, CRWG···H series and CRW series is indicated in Table 10. When vibration and shock are large or moment load is applied, it is recommended to fix by using the torque 1.3 times larger than that indicated in the table. In addition, when high running accuracy is required with no vibration and shock, it may be fixed by using torque smaller than that indicated in the table, however, it is recommended to use adhesive agent to fasten the screw, or to use stop bolts.

Table 10 Tightening torque for fixing screw

Bolt size	Tightening torque N · m
M 2×0.4	0.23
M 3×0.5	1.4
M 4×0.7	3.2
M 5×0.8	6.3
M 6×1	10.7
M 8×1.25	25.6
M10×1.5	50.1
M12×1.75	86.5
M14×2	137
M16×2	211

Remark
When fixing screws used on the table side and bed side are not identical, fasten them all to the smaller tightening torque.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Mounting

Mounting of CRWG series and CRWG···H series

Typical mounting structure is shown in Fig. 14. For mounting at this point, generally follow the procedure below.

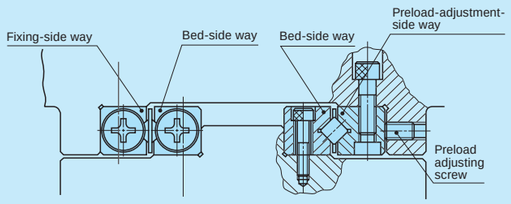


Fig. 14 Mounting example of CRWG and CRWG···H

❶ Preparation for mounting

- Products are packed by set (4 ways and 2 pairs of roller cages). Be careful not to mix with other sets.
- Remove end screws and end stopper, clean up each part with clean wash fluid and then apply rust prevention and lubrication oil.

❷ Cleanup of mounting surface

- Remove burrs and blemishes on the machine mounting surface with an oil-stone, etc. Be careful about corner groove on the mounting surface, too.
- Wipe off dust and dirt with clean cloth and apply rust prevention and lubrication oil lightly.

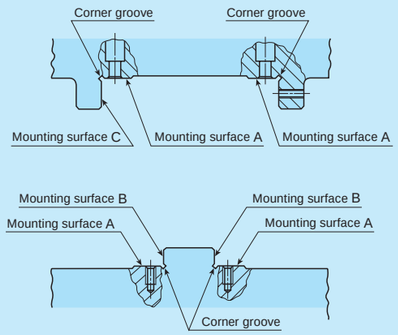


Fig. 15 Mounting surface

❸ Mounting of bed-side way

- Properly align the way with mounting surface and temporarily tighten fixing screws evenly to the tightening torque.
- While making the way sticking to B surface (refer to Fig. 15) tight, fully tighten the screws to the specified torque.
- When high running accuracy is required, fully and evenly tighten them to the specified torque while checking the parallelism of the raceway along the full length of the way.
- Typical tightening torque for fixing screw is according to Table 10 in page Ⅱ-20.

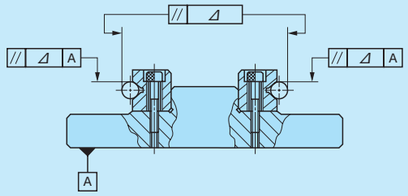


Fig. 16 Accuracy of way mounting

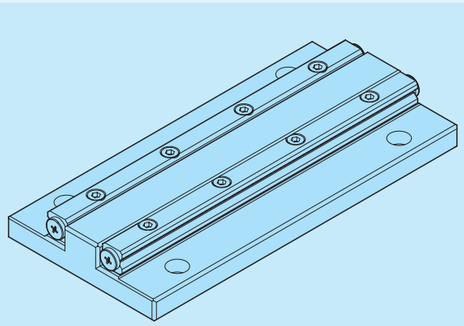


Fig. 17

❹ Operation of table and bed

- Position the roller cages at the stroke end positions of the bed-side way. (Refer to Fig. 18)
- Mate the pinion gear at the center of the cage and the rack of the way.
- At this point, be careful not to deform the cage.

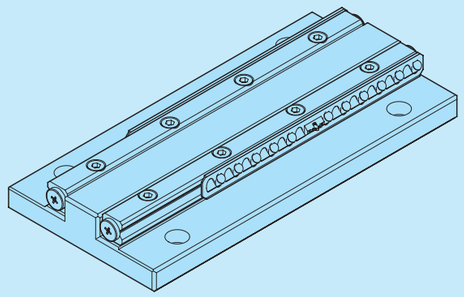


Fig. 18

- Position the table-side way in the stroke end position. (Refer to Fig. 19)
- Mate the pinion gear at the center of the cage and the rack of the table-side way.

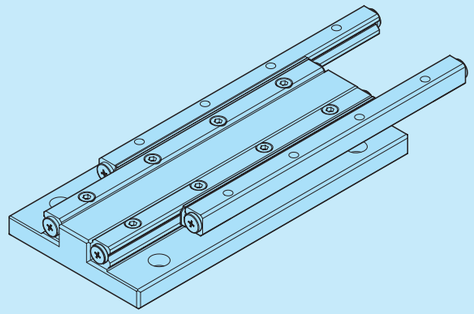


Fig. 19

- Position the table-side way approximately in the stroke center position. (Refer to Fig. 20)

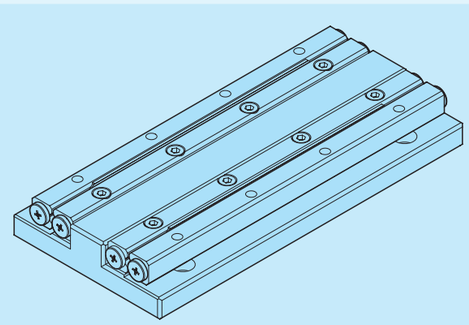


Fig. 20

- Position the table while holding the way to prevent it from moving. (Refer to Fig. 21)

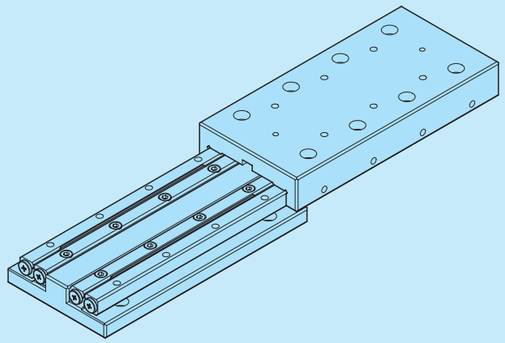


Fig. 21

- Temporarily tighten the table fixing screws. (Refer to Fig. 22)

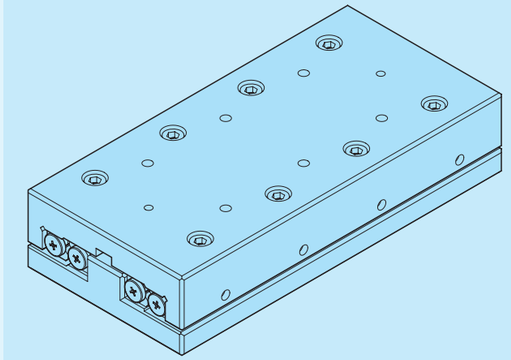


Fig. 22

- Fully stroke the table softly and check that it is within the stroke range used and cylindrical rollers on both ends of the cage do not contact with end screws of the way. If they make contact, take the procedure again. (Refer to Fig. 23)

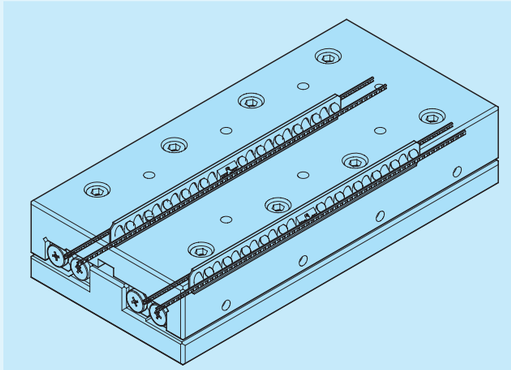


Fig. 23

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

❺ Preload adjustment

- Preload adjustment is performed with fixing screws of the table-side way tightened temporarily.
- Preload adjustment is started from the preload adjusting screw at the center of way length and then both ends in turn.
- While measuring the clearance on the table sides, tighten the preload adjusting screws subsequently until deflection of the dial gauge stops. Measure the tightening torque for preload adjusting screws at this point.
- When adjusting preload adjusting screw near either end, stroke the table softly and check that the cylindrical roller is on the preload adjusting screw section.
- After the above procedure, the clearance becomes zero or in slight preload state, but preload is still not adjusted evenly. With the same procedure again, re-adjust all the preload adjusting screws evenly to the torque previously measured.




Fig. 24 Example of preload adjustment method

❻ Full tightening of preload-adjustment-side way

- Fixing screws are lightly tightened to even torque. As with preload adjusting screws, temporarily fix them to torque similar to the specified torque in turn from the way center to both ends.
- When tightening fixing screws near either end, stroke the table softly and check that the cylindrical roller is on fixing screw section.
- Finally with the same procedure, fully tighten all the fixing screws evenly to the specified torque.

❼ Check after assembly

- Fully stroke the table softly and check that running is smooth without abnormal noise.
- Measure the table upper and side surfaces with dial gauge or the like and check the running accuracy.




Fig. 25 Accuracy check after assembly

Mounting of standard type CRW series

Typical mounting structure is shown in Fig. 26. For mounting at this point, generally follow the procedure below.

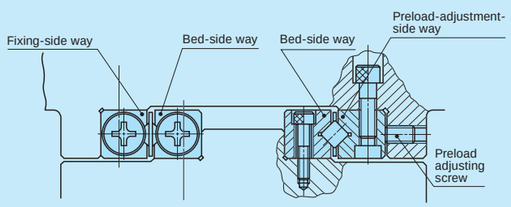


Fig. 26 Mounting example of standard type CRW series

❶ Preparation for mounting

- Products are packed by set (4 ways and 2 pairs of roller cages). Be careful not to mix with other sets.
- Remove end screws and end stopper, clean up each part with clean wash fluid and then apply rust prevention and lubrication oil.

❷ Cleanup of mounting surface

- Remove burrs and blemishes on the machine mounting surface with an oil-stone, etc. Be careful about corner groove on the mounting surface, too.
- Wipe off dust and dirt with clean cloth and apply rust prevention and lubrication oil lightly.

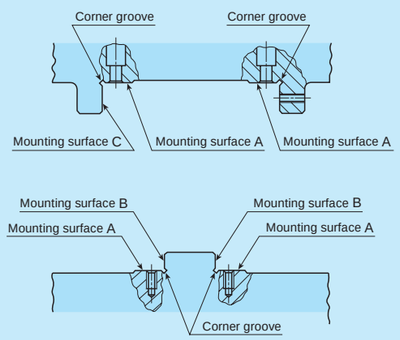


Fig. 27 Mounting surface

❸ Mounting of bed-side way

- Properly align the way with mounting surface and temporarily tighten fixing screws evenly to the tightening torque.
- While making the way sticking to B surface (refer to Fig. 27) tight, fully tighten the screws to the specified torque.
- When high running accuracy is required, fully and evenly tighten them to the specified torque while checking the parallelism of the raceway along the full length of the way.
- Typical tightening torque for fixing screw is according to Table 10 in page Ⅱ-20.

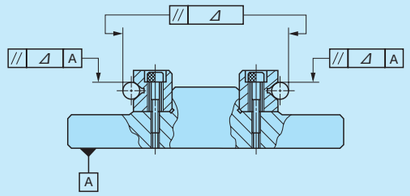


Fig. 28 Accuracy of way mounting

❹ Mounting of table-side way

- Properly align the fixing-side way with mounting surface and temporarily tighten fixing screws evenly to the tightening torque.
- While making the fixing-side way sticking to C surface tight, fully tighten the screws to the specified torque.
- Set back the preload adjusting screws in advance, make the preload-adjusting-side way sticking to the mounting surface, and then temporarily tighten fixing screws lightly to the even torque.

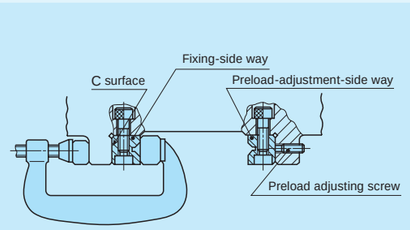


Fig. 29 Mounting of table-side way

❺ Operation of table and bed

- Make alignment of the position in height and cross direction so that the roller cage can be inserted between the table-side way and bed-side way.
- Carefully insert the roller cage and assembly it at approximate center of the way length. At this point, be careful not to deform the cage.
- Mount end screws and end stopper of each way.
- Push the entire table against the preload adjusting screws and tighten the preload adjusting screws to make temporary adjustment until the clearance between ways becomes zero.
- Fully stroke the table softly and correct the roller cage position to the center.




Fig. 30 Position alignment before operation

❻ Preload adjustment

- Preload adjustment is performed with fixing screws of the preload-adjusting-side way tightened temporarily.
- Preload adjustment is started from the preload adjusting screw at the center of way length and then both ends in turn.
- While measuring the clearance on the table sides, tighten the preload adjusting screws subsequently until deflection of the dial gauge stops. Measure the tightening torque for preload adjusting screws at this point.
- When adjusting preload adjusting screw near either end, stroke the table softly and check that the cylindrical roller is on the preload adjusting screw section.
- After the above procedure, the clearance becomes zero or in slight preload state, but preload is still not adjusted evenly. With the same procedure again, re-adjust all the preload adjusting screws evenly to the torque previously measured.




Fig. 31 Example of preload adjustment method

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

❼ Full tightening of preload-adjustment-side way

- Fixing screws are lightly tightened to even torque. As with preload adjusting screws, temporarily fix them to torque similar to the specified torque in turn from the way center to both ends.
- When tightening fixing screws near either end, stroke the table softly and check that the cylindrical roller is on fixing screw section.
- Finally with the same procedure, fully tighten all the fixing screws evenly to the specified torque.

❽ Check after assembly

- Fully stroke the table softly and check that running is smooth without abnormal noise.
- Measure the table upper and side surfaces with dial gauge or the like and check the running accuracy.




Fig. 32 Accuracy check after assembly

Mounting of module type CRW series

Typical mounting structure of CRWM is shown in Fig. 33. For mounting at this point, generally follow the procedure below.

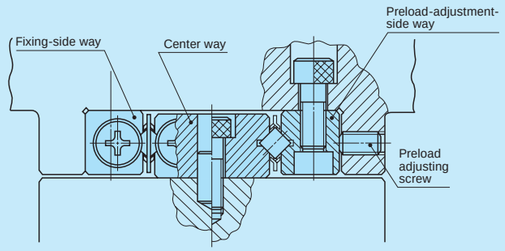


Fig. 33 Example of mounting of CRWM

❶ Preparation for mounting

- Crossed Roller Way is packed by set (1 center way, 2 ways and 2 pairs of roller cages). Be careful not to mix with other sets.
- Remove end screws and end stopper, clean up each part with clean wash fluid and then apply rust prevention and lubrication oil.

❷ Cleanup of mounting surface

- Remove burrs and blemishes on the machine mounting surface with an oil-stone, etc. Be careful about corner groove on the mounting surface, too.
- Wipe off dust and dirt with clean cloth and apply rust prevention and lubrication oil lightly.

❸ Mounting of center way

- Roughly align the center way to the mounting surface and lightly fix it with fixing screws.
- While measuring mounting parallelism of the center way and raceway to the reference surface of running parallelism for position correction, temporarily tighten the fixing screws to the even tightening torque.
- Evenly tighten all the fixing screws to the specified tightening torque.




Fig. 34 Mounting accuracy check for center way

❹ Processing of dowel pin hole

- When dowel pins are used, machine holes on the bed in alignment with dowel pin holes near either end of the center way.
- Dowel pin hole of the center way is finished for H7. Finish bed holes in the same way.
- Diameter and its allowance of dowel pin hole of the center way vary depending on the dimension table.
- Eliminate cutting chips and clean up again as necessary. When machines for mounting of the center way are large, clean them up with the center way removed and then reassemble.
- Load the dowel pins and check the parallelism of the reference surface of the running parallelism and the raceway of the center way again.




Fig. 35 Machining of dowel pin hole

❺ Mounting of table-side way

- Follow the mounting of standard type CRW series.

❻ Operation of table and bed

- Follow the mounting of standard type CRW series.

❼ Preload adjustment

- Follow the mounting of standard type CRW series.

❽ Full tightening of preload-adjustment-side way

- Follow the mounting of standard type CRW series.

❾ Check after assembly

- Follow the mounting of standard type CRW series.

Mating marks module type CRW series

CRWM has mating marks to ensure the best running accuracy after mounting based on the parallelism measurement result of reference mounting surface and raceway. When assembling the ways, align the mating marks of ways with the same end side as indicated in Fig. 36.


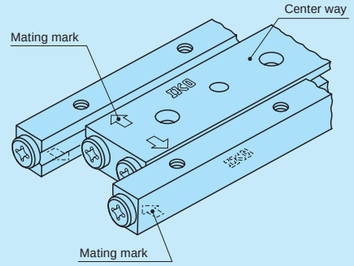



Fig. 36 Mating marks of CRWM


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

IKO Anti-Creep Cage Crossed Roller Way

Shape	CRWG
Size	2 · 3 · 4 · 6

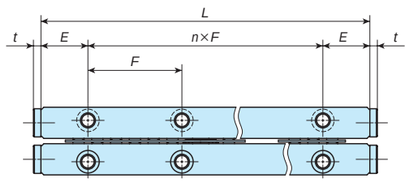






Identification number	Mass (Ref.) Way (1) g	Mass (Ref.) Roller cage (2) g	Boundary dimensions A	H	L(n×F)	E	Dimension of roller cage D_w	R		Z	p	e	Mounting dimensions W	g	M	d_1	d_2	h	t	Maximum stroke length mm	Basic dynamic load rating C(3) N	Basic static load rating C_0(3) N	Allowable load F(3) N
CRWG 2- 30	6.53	0.38			30(1×15)			25.6		4										9	913	1 180	392
CRWG 2- 45	9.53	0.72			45(2×15)			41.6		8										7	1 570	2 350	783
CRWG 2- 60	12.5	0.88			60(3×15)			49.6		10										21	1 860	2 940	979
CRWG 2- 75	15.5	1.22			75(4×15)			65.6		14										19	2 420	4 110	1 370
CRWG 2- 90	18.5	1.39	12	6	90(5×15)	7.5	2	73.6		16	4	2.8	5.5	2.5	M3	2.55	4.4	2	1.5	33	2 680	4 700	1 570
CRWG 2-105	21.5	1.72			105(6×15)			89.6		20										31	3 190	5 880	1 960
CRWG 2-120	24.5	1.89			120(7×15)			97.6		22										45	3 440	6 460	2 150
CRWG 2-135	27.5	2.22			135(8×15)			113.6		26										43	3 910	7 640	2 550
CRWG 2-150	30.5	2.39			150(9×15)			121.6		28										57	4 150	8 230	2 740
CRWG 3- 50	22.8	1.69			50(1×25)			42		6										13	2 740	3 660	1 220
CRWG 3- 75	33.3	2.71			75(2×25)			62		10										23	4 080	6 090	2 030
CRWG 3-100	43.8	3.72			100(3×25)			82		14										33	5 300	8 530	2 840
CRWG 3-125	54.4	4.74			125(4×25)			102		18										43	6 440	11 000	3 660
CRWG 3-150	64.9	5.75	18	8	150(5×25)	12.5	3	122		22	5	3.5	8.3	3.5	M4	3.3	6	3.1	2	53	7 530	13 400	4 470
CRWG 3-175	75.4	6.77			175(6×25)			142		26										63	8 570	15 800	5 280
CRWG 3-200	85.9	7.78			200(7×25)			162		30										73	9 580	18 300	6 090
CRWG 3-225	96.4	8.80			225(8×25)			182		34										83	10 600	20 700	6 910
CRWG 3-250	107	9.81			250(9×25)			202		38										93	11 500	23 200	7 720


Notes (1) The value shows the mass of a piece of way.
(2) The value shows the mass of a roller cage.
(3) This is the value when a combination of four ways and two roller cages is used in parallel arrangement.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

IKO Anti-Creep Cage Crossed Roller Way

Shape	CRWG
Size	2 / 3 / 4 / 6

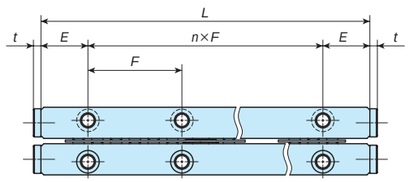






Identification number	Mass (Ref.) Way (1) g	Mass (Ref.) Roller cage (2) g	Boundary dimensions A	H	L(n×F)	E	Dimension of roller cage D_w	R		Z	p	e	Mounting dimensions W	g	M	d_1	d_2	h	t	Maximum stroke length mm	Basic dynamic load rating C(3) N	Basic static load rating C_0(3) N	Allowable load F(3) N
CRWG 4- 80	59.6	9.70	22	11	80(1×40)	20	4	73		8	7	5	10	4.5	M5	4.3	7.5	4.1	2	14	6 690	9 400	3 130
CRWG 4-120	88.0	12.0			120(2×40)			101		12										38	9 180	14 100	4 700
CRWG 4-160	116	14.3			160(3×40)			129		16										62	11 500	18 800	6 270
CRWG 4-200	145	16.7			200(4×40)			157		20										86	13 700	23 500	7 830
CRWG 4-240	173	20.1			240(5×40)			199		26										82	16 700	30 600	10 200
CRWG 4-280	201	22.5			280(6×40)			227		30										106	18 700	35 300	11 800
CRWG 4-320	230	24.8			320(7×40)			255		34										129	20 600	40 000	13 300
CRWG 6-100	147	12.0	31	15	100(1×50)	25	6	75		6	9	6	14	6	M6	5.3	9.5	5.2	3	48	11 200	13 800	4 610
CRWG 6-150	216	22.6			150(2×50)			129		12										40	19 300	27 700	9 230
CRWG 6-200	285	29.7			200(3×50)			165		16										68	24 100	36 900	12 300
CRWG 6-250	353	36.8			250(4×50)			201		20										96	28 700	46 100	15 400
CRWG 6-300	422	43.9			300(5×50)			237		24										124	33 000	55 400	18 500
CRWG 6-350	491	51.0			350(6×50)			273		28										151	37 200	64 600	21 500


Notes (1) The value shows the mass of a piece of way.
(2) The value shows the mass of a roller cage.
(3) This is the value when a combination of four ways and two roller cages is used in parallel arrangement.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

IKO Anti-Creep Cage Crossed Roller Way H

Shape	CRWG…H		
Size	2	3	4

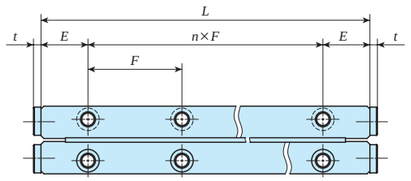






Identification number	Mass (Ref.)		Nominal dimensions mm																			Maximum stroke length	Basic dynamic load rating	Basic static load rating	Allowable load
	Way (1)	Roller cage (2)	Boundary dimensions				Dimension of roller cage							Mounting dimensions											
			A	H	$L(n\times F)$	E	D_w	R		Z	p	e	W	g	M	d_1	d_2	h	t		C(3)	C_0(3)	F(3)
	g	g																		mm	N	N	N
CRWG 2- 30H	6.53	0.40			30(1×15)			21.7		6										12	1 090	1 500	500
CRWG 2- 45H	9.53	0.73			45(2×15)			36.7		12										12	1 860	3 000	1 000
CRWG 2- 60H	12.5	0.95			60(3×15)			46.7		16										22	2 330	4 000	1 330
CRWG 2- 75H	15.5	1.27			75(4×15)			61.7		22										22	2 980	5 500	1 830
CRWG 2- 90H	18.5	1.38	12	6	90(5×15)	7.5	2	66.7		24	2.5	1.6	5.5	2.5	M3	2.55	4.4	2	1.5	42	3 190	6 000	2 000
CRWG 2-105H	21.5	1.71			105(6×15)			81.7		30										42	3 790	7 500	2 500
CRWG 2-120H	24.5	1.93			120(7×15)			91.7		34										52	4 180	8 500	2 830
CRWG 2-135H	27.5	2.26			135(8×15)			106.7		40										52	4 740	10 000	3 330
CRWG 2-150H	30.5	2.48			150(9×15)			117.5		44		2								62	5 100	11 000	3 670
CRWG 3- 50H	22.8	1.58			50(1×25)			41.8		8										13	4 260	6 490	2 160
CRWG 3- 75H	33.7	2.28			75(2×25)			57		12										29	5 840	9 730	3 240
CRWG 3-100H	44.7	3.33			100(3×25)			79.8		18										33	8 000	14 600	4 870
CRWG 3-125H	55.7	4.02			125(4×25)			95		22										53	9 350	17 800	5 950
CRWG 3-150H	66.7	5.07	18	8	150(5×25)	12.5	3	117.8		28	3.8	2.5	8.6	3.5	M4	3.3	6	3.1	2	57	11 300	22 700	7 570
CRWG 3-175H	77.6	5.69			175(6×25)			133		32										77	12 500	26 000	8 650
CRWG 3-200H	88.6	6.81			200(7×25)			155.8		38										81	14 300	30 800	10 300
CRWG 3-225H	99.6	7.85			225(8×25)			178.6		44										86	16 000	35 700	11 900
CRWG 3-250H	111	8.55			250(9×25)			193.8		48										105	17 100	38 900	13 000
CRWG 4- 80H	61.4	4.35			80(1×40)			59.4		10										23	10 500	17 100	5 690
CRWG 4-120H	92.7	6.80			120(2×40)			88.2		16										45	15 200	27 300	9 100
CRWG 4-160H	124	9.25			160(3×40)			117		22										68	19 500	37 500	12 500
CRWG 4-200H	155	11.7	22	11	200(4×40)	20	4	145.8		28	4.8	3	10.6	4.5	M5	4.3	7.5	4.1	2	90	23 500	47 800	15 900
CRWG 4-240H	186	15.0			240(5×40)			184.2		36										93	28 600	61 400	20 500
CRWG 4-280H	218	17.4			280(6×40)			213		42										116	32 200	71 700	23 900
CRWG 4-320H	249	19.9			320(7×40)			241.8		48										138	35 700	81 900	27 300

Notes (1) The value shows the mass of a piece of way.
(2) The value shows the mass of a roller cage.
(3) This is the value when a combination of four ways and two roller cages is used in parallel arrangement.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch


Standard type


Shape: CRW, CRW···SL



Size	1	2	3	4	6
	9	12	15	18	24

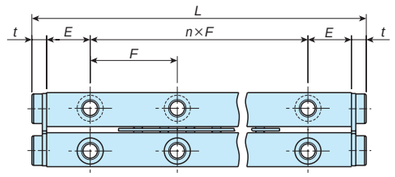








Identification number	Mass (Ref.) Way (1) kg/m	Mass (Ref.) Roller cage (2) g	Boundary dimensions A	H	L(n×F)	E	Dimension of roller cage D_w	R		Nominal dimensions mm Z	p	e	Mounting dimensions W	g	M	d_1	d_2	h	t	Basic dynamic load rating C_U(3) N	Basic static load rating C_{0U}(3) N	Allowable load F_U(3) N
CRW 1- 20					20 (1×10)			16.5		5												
CRW 1- 20 SL																						
CRW 1- 30					30 (2×10)			25.5		8												
CRW 1- 30 SL																						
CRW 1- 40					40 (3×10)			31.5		10												
CRW 1- 40 SL																						
CRW 1- 50	0.12	0.38	8.5	4	50 (4×10)	5	1.5	37.5		12	3	2.25	3.9	1.8	M2	1.65	3	1.4	1.7	125	120	39.8
CRW 1- 50 SL																						
CRW 1- 60					60 (5×10)			43.5		14												
CRW 1- 60 SL																						
CRW 1- 70					70 (6×10)			52.5		17												
CRW 1- 70 SL																						
CRW 1- 80					80 (7×10)			61.5		20												
CRW 1- 80 SL																						

Notes (1) The value shows the mass per meter of a way.
(2) The value shows the mass of a roller cage with ten cylindrical rollers.
(3) The value shows the load of a cylindrical roller.


Standard type


Shape: CRW
CRW…SL




Size

1	2	3	4	6
9	12	15	18	24

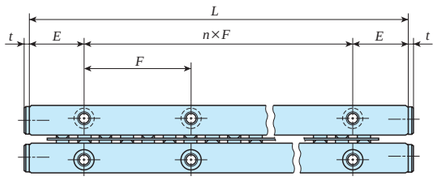








Identification number	Mass (Ref.) Way (1) kg/m	Mass (Ref.) Roller cage (2) g	Boundary dimensions A	H	L(n×F)	E	Dimension of roller cage D_w	R		Nominal dimensions mm Z	p	e	Mounting dimensions W	g	M	d_1	d_2	h	t	Basic dynamic load rating C_U(3) N	Basic static load rating C_{0U}(3) N	Allowable load F_U(3) N
CRW 2- 30					30 (1×15)			29.6		7												
CRW 2- 30 SL																						
CRW 2- 45					45 (2×15)			41.6		10												
CRW 2- 45 SL																						
CRW 2- 60					60 (3×15)			53.6		13												
CRW 2- 60 SL																						
CRW 2- 75					75 (4×15)			65.6		16												
CRW 2- 75 SL																						
CRW 2- 90					90 (5×15)			77.6		19												
CRW 2- 90 SL																						
CRW 2-105	0.24	0.98	12	6	105 (6×15)	7.5	2	89.6		22	4	2.8	5.5	2.5	M3	2.55	4.4	2	1.5	293	294	97.9
CRW 2-105 SL																						
CRW 2-120					120 (7×15)			101.6		25												
CRW 2-120 SL																						
CRW 2-135					135 (8×15)			113.6		28												
CRW 2-135 SL																						
CRW 2-150					150 (9×15)			125.6		31												
CRW 2-150 SL																						
CRW 2-165					165 (10×15)			137.6		34												
CRW 2-165 SL																						
CRW 2-180					180 (11×15)			149.6		37												
CRW 2-180 SL																						

Notes (1) The value shows the mass per meter of a way.
(2) The value shows the mass of a roller cage with ten cylindrical rollers.
(3) The value shows the load of a cylindrical roller.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch


Standard type


Shape: **CRW**
CRW···SL



Size	1	2	3	4	6
	9	12	15	18	24

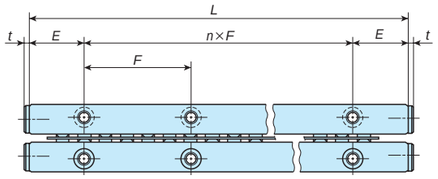







Identification number	Mass (Ref.) Way (1) kg/m	Mass (Ref.) Roller cage (2) g	Boundary dimensions A	Boundary dimensions H	Boundary dimensions L(n×F)	Boundary dimensions E	Dimension of roller cage D_w	Dimension of roller cage R	Z	p	e	Mounting dimensions W	Mounting dimensions g	Mounting dimensions M	Mounting dimensions d_1	Mounting dimensions d_2	Mounting dimensions h	Mounting dimensions t	Basic dynamic load rating C_U(3) N	Basic static load rating C_{0U}(3) N	Allowable load F_U(3) N
CRW 3- 50	0.50	2.96	18	8	50 (1×25)	12.5	3	42	8	5	3.5	8.3	3.5	M4	3.3	6	3.1	2	638	609	203
CRW 3- 50 SL																					
CRW 3- 75					75 (2×25)			62	12												
CRW 3- 75 SL																					
CRW 3-100					100 (3×25)			82	16												
CRW 3-100 SL																					
CRW 3-125					125 (4×25)			102	20												
CRW 3-125 SL																					
CRW 3-150					150 (5×25)			122	24												
CRW 3-150 SL																					
CRW 3-175					175 (6×25)			142	28												
CRW 3-175 SL																					
CRW 3-200					200 (7×25)			162	32												
CRW 3-200 SL																					
CRW 3-225					225 (8×25)			182	36												
CRW 3-225 SL																					
CRW 3-250					250 (9×25)			202	40												
CRW 3-250 SL																					
CRW 3-275					275 (10×25)			222	44												
CRW 3-275 SL																					
CRW 3-300					300 (11×25)			242	48												
CRW 3-300 SL																					


Notes (1) The value shows the mass per meter of a way.
(2) The value shows the mass of a roller cage with ten cylindrical rollers.
(3) The value shows the load of a cylindrical roller.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Standard type


Shape


CRW
CRW···SL




Size

1	2	3	4	6
9	12	15	18	24

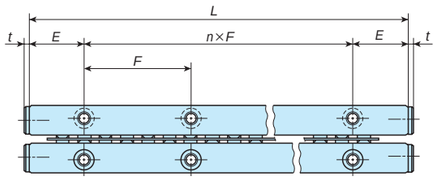








Identification number	Mass (Ref.) Way (1) kg/m	Mass (Ref.) Roller cage (2) g	Boundary dimensions A	Boundary dimensions H	Boundary dimensions L(n×F)	Boundary dimensions E	Dimension of roller cage D_w	Dimension of roller cage R	Z	p	e	Mounting dimensions W	Mounting dimensions g	Mounting dimensions M	Mounting dimensions d_1	Mounting dimensions d_2	Mounting dimensions h	Mounting dimensions t	Basic dynamic load rating C_U(3) N	Basic static load rating C_{0U}(3) N	Allowable load F_U(3) N
CRW 4- 80	0.82	6.91	22	11	80 (1×40)	20	4	73	10	7	5	10	4.5	M5	4.3	7.5	4.1	2	1 230	1 180	392
CRW 4- 80 SL																					
CRW 4-120					120 (2×40)			101	14												
CRW 4-120 SL																					
CRW 4-160					160 (3×40)			136	19												
CRW 4-160 SL																					
CRW 4-200					200 (4×40)			164	23												
CRW 4-200 SL																					
CRW 4-240					240 (5×40)			199	28												
CRW 4-240 SL																					
CRW 4-280					280 (6×40)			227	32												
CRW 4-280 SL																					
CRW 4-320					320 (7×40)			262	37												
CRW 4-320 SL																					
CRW 4-360					360 (8×40)			297	42												
CRW 4-360 SL																					
CRW 4-400					400 (9×40)			325	46												
CRW 4-400 SL																					
CRW 4-440					440 (10×40)			360	51												
CRW 4-440 SL																					
CRW 4-480					480 (11×40)			388	55												
CRW 4-480 SL																					

Notes (1) The value shows the mass per meter of a way.
(2) The value shows the mass of a roller cage with ten cylindrical rollers.
(3) The value shows the load of a cylindrical roller.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch


Standard type


Shape: CRW
CRW…SL



Size	1	2	3	4	6
	9	12	15	18	24

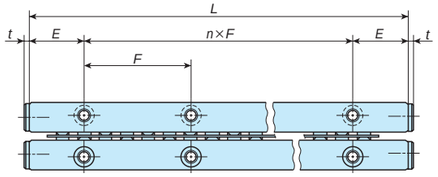








Identification number	Mass (Ref.) Way (1) kg/m	Mass (Ref.) Roller cage (2) g	Boundary dimensions A	Boundary dimensions H	Boundary dimensions L(n×F)	Boundary dimensions E	Dimension of roller cage Dw	Dimension of roller cage R	Z	p	e	Mounting dimensions W	Mounting dimensions g	Mounting dimensions M	Mounting dimensions d1	Mounting dimensions d2	Mounting dimensions h	Mounting dimensions t	Basic dynamic load rating CU(3) N	Basic static load rating C0U(3) N	Allowable load FU(3) N
CRW 6-100	1.57	20.3	31	15	100 (1×50)	25	6	84	9	9	6	14	6	M6	5.3	9.5	5.2	3	2 570	2 310	769
CRW 6-100 SL																					
CRW 6-150					150 (2×50)			129	14												
CRW 6-150 SL																					
CRW 6-200					200 (3×50)			165	18												
CRW 6-200 SL																					
CRW 6-250					250 (4×50)			210	23												
CRW 6-250 SL																					
CRW 6-300					300 (5×50)			246	27												
CRW 6-300 SL																					
CRW 6-350					350 (6×50)			282	31												
CRW 6-350 SL																					
CRW 6-400					400 (7×50)			327	36												
CRW 6-400 SL																					
CRW 6-450					450 (8×50)			363	40												
CRW 6-450 SL																					
CRW 6-500					500 (9×50)			408	45												
CRW 6-500 SL																					
CRW 6-550					550 (10×50)			444	49												
CRW 6-550 SL																					
CRW 6-600					600 (11×50)			489	54												
CRW 6-600 SL																					

Notes (1) The value shows the mass per meter of a way.
(2) The value shows the mass of a roller cage with ten cylindrical rollers.
(3) The value shows the load of a cylindrical roller.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch


Standard type


Shape: CRW



Size: 1 | 2 | 3 | 4 | 6 / 9 | 12 | 15 | 18 | 24

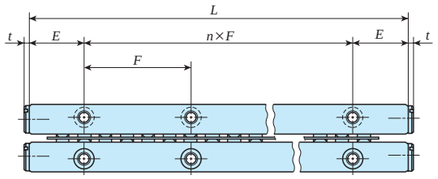








Identification number	Mass (Ref.) Way (1) kg/m	Mass (Ref.) Roller cage (2) g	Boundary dimensions A	H	L(n×F)	E	Dimension of roller cage D_w	R		Nominal dimensions mm Z	p	e	Mounting dimensions W	g	M	d_1	d_2	h	t	Basic dynamic load rating C_U (3) N	Basic static load rating C_{0U} (3) N	Allowable load F_U (3) N
CRW 9- 200					200 (1×100)			173		12												
CRW 9- 300					300 (2×100)			257		18												
CRW 9- 400					400 (3×100)			327		23												
CRW 9- 500					500 (4×100)			411		29												
CRW 9- 600					600 (5×100)			495		35												
CRW 9- 700	3.3	64.8	44	22	700 (6×100)	50	9	565		40	14	9.5	20.2	9	M 8	6.8	10.5	6.2	3	7 190	6 600	2 200
CRW 9- 800					800 (7×100)			649		46												
CRW 9- 900					900 (8×100)			733		52												
CRW 9-1000					1 000 (9×100)			817		58												
CRW 9-1100					1 100 (10×100)			887		63												
CRW 9-1200					1 200 (11×100)			971		69												
CRW 12- 200					200 (1×100)			168		9												
CRW 12- 300					300 (2×100)			258		14												
CRW 12- 400					400 (3×100)			330		18												
CRW 12- 500					500 (4×100)			420		23												
CRW 12- 600					600 (5×100)			492		27												
CRW 12- 700	5.57	146	58	28	700 (6×100)	50	12	564		31	18	12	26.9	12	M10	8.5	13.5	8.2	3	14 700	13 600	4 540
CRW 12- 800					800 (7×100)			654		36												
CRW 12- 900					900 (8×100)			726		40												
CRW 12-1000					1 000 (9×100)			816		45												
CRW 12-1100					1 100 (10×100)			888		49												
CRW 12-1200					1 200 (11×100)			978		54												

Notes (1) The value shows the mass per meter of a way.
(2) The value shows the mass of a roller cage with ten cylindrical rollers.
(3) The value shows the load of a cylindrical roller.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch


Standard type


Shape: CRW



Size: 1 2 3 4 6 / 9 12 15 18 24

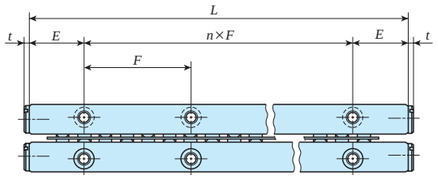








Identification number	Mass (Ref.) Way (1) kg/m	Mass (Ref.) Roller cage (2) g	Boundary dimensions A	H	L(n×F)	E	Dimension of roller cage D_w	R		Nominal dimensions mm Z	p	e	Mounting dimensions W	g	M	d_1	d_2	h	t	Basic dynamic load rating C_U(3) N	Basic static load rating C_{0U}(3) N	Allowable load F_U(3) N
CRW 15- 300*	8.75	273	71	36	300 (2×100)	50	15	261		11	23	15.5	33	14	M12	10.5	16.5	10.2	5	23 800	21 900	7 300
CRW 15- 400*					400 (3×100)			330		14												
CRW 15- 500*					500 (4×100)			422		18												
CRW 15- 600*					600 (5×100)			491		21												
CRW 15- 700*					700 (6×100)			583		25												
CRW 15- 800*					800 (7×100)			652		28												
CRW 15- 900*					900 (8×100)			744		32												
CRW 15-1000*					1 000 (9×100)			813		35												
CRW 15-1100*					1 100 (10×100)			905		39												
CRW 15-1200*					1 200 (11×100)			974		42												
CRW 18- 300*	11.3	447	83	40	300 (2×100)	50	18	262		9	28	19	38.5	18	M14	12.5	18.5	12.2	5	35 800	32 700	10 900
CRW 18- 400*					400 (3×100)			346		12												
CRW 18- 500*					500 (4×100)			430		15												
CRW 18- 600*					600 (5×100)			514		18												
CRW 18- 700*					700 (6×100)			570		20												
CRW 18- 800*					800 (7×100)			654		23												
CRW 18- 900*					900 (8×100)			738		26												
CRW 18-1000*					1 000 (9×100)			822		29												
CRW 18-1100*					1 100 (10×100)			906		32												
CRW 18-1200*					1 200 (11×100)			990		35												

Notes (1) The value shows the mass per meter of a way.
(2) The value shows the mass of a roller cage with ten cylindrical rollers.
(3) The value shows the load of a cylindrical roller.
Remark: The identification numbers with * are our semi-standard items.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch


Standard type


Shape: CRW



Size	1	2	3	4	6
	9	12	15	18	24

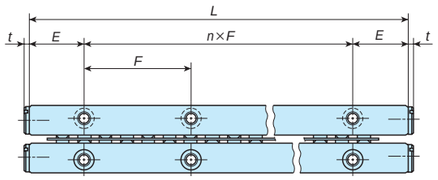








Identification number	Mass (Ref.) Way (1) kg/m	Mass (Ref.) Roller cage (2) g	Boundary dimensions A	H	L(n×F)	E	Dimension of roller cage D_w	R	Nominal dimensions mm Z	p	e	Mounting dimensions W	g	M	d_1	d_2	h	t	Basic dynamic load rating C_U(3) N	Basic static load rating C_{0U}(3) N	Allowable load F_U(3) N
CRW 24- 400*					400 (3×100)			336	9												
CRW 24- 500*					500 (4×100)			408	11												
CRW 24- 600*					600 (5×100)			516	14												
CRW 24- 700*					700 (6×100)			588	16												
CRW 24- 800*	20.6	1 060	110	55	800 (7×100)	50	24	660	18	36	24	51.5	24	M16	14.5	22.5	14.2	5	69 600	63 500	21 200
CRW 24- 900*					900 (8×100)			732	20												
CRW 24-1000*					1 000 (9×100)			840	23												
CRW 24-1100*					1 100 (10×100)			912	25												
CRW 24-1200*					1 200 (11×100)			984	27												

Notes (1) The value shows the mass per meter of a way.
(2) The value shows the mass of a roller cage with ten cylindrical rollers.
(3) The value shows the load of a cylindrical roller.
Remark: The identification numbers with * are our semi-standard items.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch


Module type


Shape: CRWM



Size: 1 | 2 | 3 | 4

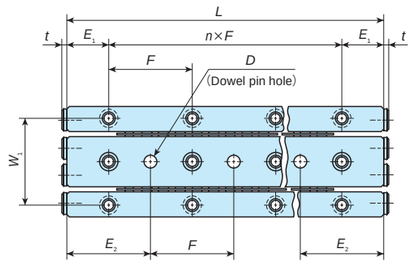








Identification number	Mass (Ref.) Way (1) kg/m	Mass (Ref.) Roller cage (2) g	Boundary dimensions A	Boundary dimensions H	Boundary dimensions L(n×F)	Boundary dimensions i	Dimension of roller cage D_w	Dimension of roller cage R	Dimension of roller cage Z	p	e	W_1	W_2	E_1	E_2	M	d_1	d_2	h	D	Dim. D tolerance	t	Basic dynamic load rating C_U(3) N	Basic static load rating C_{0U}(3) N	Allowable load F_U(3) N
CRWM 1- 20	0.49	0.38	17	4.5	20 (1×10)	0.5	1.5	16.5	5	3	2.25	13.4	7.8	5	10	M2	1.65	3	1.4	2	+0.010 0	1.7	125	120	39.8
CRWM 1- 30					30 (2×10)			25.5	8																
CRWM 1- 40					40 (3×10)			31.5	10																
CRWM 1- 50					50 (4×10)			37.5	12																
CRWM 1- 60					60 (5×10)			43.5	14																
CRWM 1- 70					70 (6×10)			52.5	17																
CRWM 1- 80					80 (7×10)			61.5	20																
CRWM 2- 30	0.99	0.98	24	6.5	30 (1×15)	0.5	2	29.6	7	4	2.8	19	11	7.5	15	M3	2.55	4.4	2	3	+0.010 0	1.5	293	294	97.9
CRWM 2- 45					45 (2×15)			41.6	10																
CRWM 2- 60					60 (3×15)			53.6	13																
CRWM 2- 75					75 (4×15)			65.6	16																
CRWM 2- 90					90 (5×15)			77.6	19																
CRWM 2-105					105 (6×15)			89.6	22																
CRWM 2-120					120 (7×15)			101.6	25																
CRWM 2-135					135 (8×15)			113.6	28																
CRWM 2-150					150 (9×15)			125.6	31																
CRWM 2-165					165 (10×15)			137.6	34																
CRWM 2-180					180 (11×15)			149.6	37																

Notes (1) The value shows the total mass per meter of a set of three ways.
(2) The value shows the mass of a roller cage with ten cylindrical rollers.
(3) The value shows the load of a cylindrical roller.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch


Module type


Shape: **CRWM**



Size: 1 | 2 | 3 | 4

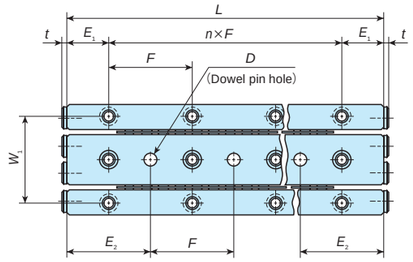










Identification number	Mass (Ref.) Way (1) kg/m	Mass (Ref.) Roller cage (2) g	Boundary dimensions A	Boundary dimensions H	Boundary dimensions L(n×F)	Boundary dimensions i	Dimension of roller cage Dw	Dimension of roller cage R	Dimension of roller cage Z	Nominal dimensions and tolerances mm p	e	Mounting dimensions W1	W2	E1	E2	M	d1	d2	h	D	Dim. D tolerance	t	Basic dynamic load rating CU(3) N	Basic static load rating C0U(3) N	Allowable load FU(3) N
CRWM 3- 50	1.99	2.96	36	8.5	50 (1×25)	0.5	3	42	8	5	3.5	29	16.6	12.5	25	M4	3.3	6	3.1	4	+0.012 0	2	638	609	203
CRWM 3- 75					75 (2×25)			62	12																
CRWM 3-100					100 (3×25)			82	16																
CRWM 3-125					125 (4×25)			102	20																
CRWM 3-150					150 (5×25)			122	24																
CRWM 3-175					175 (6×25)			142	28																
CRWM 3-200					200 (7×25)			162	32																
CRWM 3-225					225 (8×25)			182	36																
CRWM 3-250					250 (9×25)			202	40																
CRWM 3-275					275 (10×25)			222	44																
CRWM 3-300					300 (11×25)			242	48																
CRWM 4- 80	3.28	6.91	44	11.5	80 (1×40)	0.5	4	73	10	7	5	35	20	20	40	M5	4.3	7.5	4.1	5	+0.012 0	2	1 230	1 180	392
CRWM 4-120					120 (2×40)			101	14																
CRWM 4-160					160 (3×40)			136	19																
CRWM 4-200					200 (4×40)			164	23																
CRWM 4-240					240 (5×40)			199	28																
CRWM 4-280					280 (6×40)			227	32																
CRWM 4-320					320 (7×40)			262	37																
CRWM 4-360					360 (8×40)			297	42																
CRWM 4-400					400 (9×40)			325	46																
CRWM 4-440					440 (10×40)			360	51																
CRWM 4-480					480 (11×40)			388	55																


Notes (1) The value shows the total mass per meter of a set of three ways.
(2) The value shows the mass of a roller cage with ten cylindrical rollers.
(3) The value shows the load of a cylindrical roller.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Module type	
Shape	CRWM···A 
Size	4

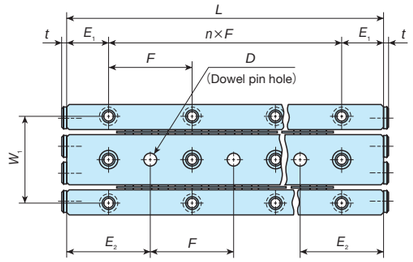







Identification number	Mass (Ref.) Way (1) kg/m	Mass (Ref.) Roller cage (2) g	Boundary dimensions A	Boundary dimensions H	Boundary dimensions L(n×F)	Boundary dimensions i	Dimension of roller cage D_w	Dimension of roller cage R	Dimension of roller cage Z	p	e	Mounting dimensions W_1	Mounting dimensions W_2	Mounting dimensions E_1	Mounting dimensions E_2	Mounting dimensions M	Mounting dimensions d_1	Mounting dimensions d_2	Mounting dimensions h	Mounting dimensions D	Mounting dimensions Dim. D tolerance	Mounting dimensions t	Basic dynamic load rating C_U (3) N	Basic static load rating C_{0U} (3) N	Allowable load F_U (3) N
CRWM 4- 80A*	3.96	6.91	48	12.5	80 (1×40)	0.5	4	73	10	7	5	38	22	20	40	M5	4.3	8	4.1	5	+0.012 0	2	1 230	1 180	392
CRWM 4-120A*					120 (2×40)			101	14																
CRWM 4-160A*					160 (3×40)			136	19																
CRWM 4-200A*					200 (4×40)			164	23																
CRWM 4-240A*					240 (5×40)			199	28																
CRWM 4-280A*					280 (6×40)			227	32																
CRWM 4-320A*					320 (7×40)			262	37																
CRWM 4-360A*					360 (8×40)			297	42																
CRWM 4-400A*					400 (9×40)			325	46																
CRWM 4-440A*					440 (10×40)			360	51																
CRWM 4-480A*					480 (11×40)			388	55																

Notes (1) The value shows the total mass per meter of a set of three ways.
(2) The value shows the mass of a roller cage with ten cylindrical rollers.
(3) The value shows the load of a cylindrical roller.
Remark: The identification numbers with * are our semi-standard items.

Anti-Creep Cage Crossed Roller Way Unit

CRWUG



Points

● High rigidity and high accuracy

1 Since CRWG or CRW with excellent load balance is incorporated with grounded high rigidity table and bed, elastic deformation is small for load in every direction, leading to highly accurate and stable linear motion.

● Solves cage creep issue

2 As CRWG with cage creep proof function is incorporated with CRWUG, there is no risk of cage creep and it works reliable in high-speed and high-tact operation, or in vertical axis.

● Wide variation

3 Three types of CRWU with different sectional shapes are available with many size variations. You can select an optimal linear bushing for the specifications of your machine and device.

● Easy mounting

4 Mounting surface is precisely grounded. In addition, female screws and boring are used for table and bed, respectively to ensure appropriate preload state. Therefore, highly reliable linear motion can be achieved just by fitting them to the machine and device.

Identification Number and Specification

Example of an identification number

The specification of CRWUG and CRWU series is indicated by the identification number. Indicate the identification number, consisting of a model code, dimensions, a part code, a material code, a classification symbol, and a supplemental code for each specification to apply.

	1	2		3	1
CRWUG series	CRWUG	60	–	130	
CRWU series	CRWU	60	–	130	R

1 Model — Model code Page Ⅱ－57

2 Width

3 Length

Dimensions Page Ⅱ－57

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Details of Identification Number and Specification

1 Model

Anti-Creep Cage Crossed Roller Way Unit (CRWUG series) : CRWUG

Crossed Roller Way Unit (CRWU series) : CRWU
: CRWU···R
: CRWU···RS

For applicable models and width, see Fig. 1.

2 Width





20, 30, 40, 60, 80, 100, 145

Indicate the table width in mm.
For applicable models and width, see Fig. 1.

3 Length

Indicate the table length in mm.

Table 1 Models and width of CRWUG series and CRWU series

Series	Shape	Model	Characteristics	Width						
				20	30	40	60	80	100	145
CRWUG		CRWUG	A unit with cage creep proof function that realizes complete compatibility with CRWU in mounting dimensions. As external dimensions are the same, this can replace machine or device using CRWU without changing mounting dimensions, as well as new applications.	–	–	○	○	○	–	–
CRWU		CRWU	An ordinary type unit to be fixed to machine or device with bolts as it is, thanks to table and bed mounted to high accuracy.	–	○	○	○	○	○	○
		CRWU···R	Low height unit without CRWU bed. Linear motion with stable accuracy and high rigidity can be achieved for load in every direction.	–	○	○	○	○	○	○
		CRWU···RS	A compact and light unit of very simple structure. This may be used as a high-accuracy unit with small motion inertia by moving the center way.	○	○	○	–	–	–	–

Load Rating and Allowable Load

Indicate values for down direction for load rating of CRWUG and CRWU series.
In addition, the upward and lateral load rating is the same as downward load rating.
For more information on the definition of load rating and calculated load, see page Ⅲ-3.




Fig. 1 Direction of load rating




Fig. 2 Direction of static moment rating


Allowable load

Allowable load refers to load of smooth rolling motion on contact surface to which maximum contact stress is applied and the sum of whose elastic deformation of rolling elements and raceway is small.
Therefore, use applied load within the allowable load range if very smooth rolling motion and high accuracy are required.

Accuracy

Accuracy of CRWUG series and CRWU series is indicated in Table 2. Parallelism at the center of the table represents parallelism of height when the table is stroked.
Parallelism at the side of the table represents parallelism of the side (preload adjusting screw side) when the table is stroked.
In addition, though allowance of unit height H is designed as ±0.1 mm, units with height variation of less than 0.01 mm among multiple units are also available. When special accuracy is needed, contact **IKO**.

Table 2 Running accuracy

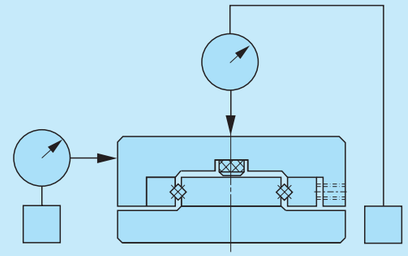

unit: μm

Unit length L mm		Parallelism at the table center	Parallelism on the table side
Above	Below		
–	50	2	4
50	100	2	5
100	160	3	6
160	310	3	7
310	510	4	8
510	710	4	9
710	–	5	10

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Lubrication

Grease is not pre-packed in the CRWUG series and CRWU series, so please perform adequate lubrication as needed.
Both of oil lubrication and grease lubrication are available in the CRWUG series and CRWU series. Generally, oil lubrication should be selected for high speed or low frictional resistance, and grease lubrication for low speed. For grease lubrication, use of high-quality lithium-soap base grease is recommended.

Dust Protection

Since the CRWUG series and CRWU series are finished with high accuracy, harmful foreign substances such as dust and particles entering into the bearing will cause low life or impaired accuracy. For applications in other than clean environment, cover the entire unit with a protective case, etc. to prevent harmful foreign substances such as dust, particles and water from outside from entering.

Precaution for Use

❶ Handling

As the CRWUG series and CRWU series are designed highly precisely, take extra care for handling.
Cage of the CRWUG series has a pinion gear incorporated. When the cage is dropped or handled roughly, the pinion gear may come off. In addition, do not cut off the cage as doing so may cause pinion gear coming off and breakage of gear joint section.
Way of the CRWUG series has a rack incorporated. In operation, take note that the rack may come off when the end screw is removed.
For the CRWU series, the cage may be deviated from the right position due to offset load or irregular and high-velocity motion, etc. Fully stroke it once in certain operating time or certain number of reciprocating motion to correct the cage position.

❷ Preload re-adjustment

Preload amount of the CRWUG series and CRWU series is adjusted to zero or slight preload state, so they may be used as they are.
Preload amount of the CRWUG series, CRWU, and CRWU··· R may be re-adjusted by following the procedure below.
Preload adjustment is started from the preload adjusting screw at the center of way length and then both ends in turn, with fixing screws of the preload adjusting side way temporarily fixed.
While measuring the clearance on the table sides, tighten the preload adjusting screws subsequently until deflection of the dial gauge stops. Measure the tightening torque for preload adjusting screws at this point.
When adjusting preload adjusting screw near either end, stroke the table softly and check that the cylindrical roller is on the preload adjusting screw section.
After the above procedure, the clearance becomes zero or in slight preload state, but preload is still not adjusted evenly. With the same procedure again, re-adjust all the preload adjusting screws evenly to the torque previously measured.

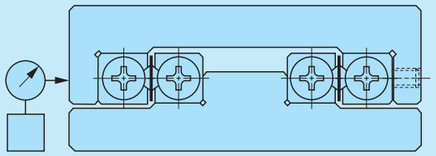


Fig. 3 Example of preload adjustment method

❸ Maximum operating temperature

As synthetic resin components are used for the CRWUG series, the maximum operating temperature is 120°C, while it should be lower than 100°C for continuous use. When it exceeds 100°C, contact IKO.
As synthetic resin components are not used for the CRWU series, it may be used at high temperature. However, when it exceeds 100°C, contact IKO.

❹ Maximum velocity

Operating velocity should not exceed 30 m/min during operation.

❺ Tightening torque for fixing screw

Typical tightening torque for mounting of the CRWUG series and CRWU series is indicated in Table 3. When vibration and shock are large or moment load is applied, it is recommended to fix by using the torque 1.3 times larger than that indicated in the table. In addition, when high running accuracy is required with no vibration and shock, it may be fixed by using torque smaller than that indicated in the table, however, it is recommended to use adhesive agent to fasten the screw, or to use stop bolts.

Table 3 Tightening torque for fixing screw

Bolt size	Tightening torque N · m
M 2×0.4	0.23
M 3×0.5	1.4
M 4×0.7	3.2
M 5×0.8	6.3
M 6×1	10.7
M 8×1.25	25.6


❻ Dowel pin hope of CRWU···R

A dowel pin hole is machined on the center way of the CRWU···R. When a dowel pin is used, machine a hole on the mounting surface of the machine after mounting of the center way.
Refer to the dimension table for diameter and its tolerances of dowel pin hole of the center way.

❼ Mounting part dimensions of CRWU···R

Not to allow the table to interfere with the mounting surface, it is necessary to set mounting surface height referring to the dimensions H_1 and H in the dimension table.
Example bed mounting dimensions are indicated in Table 4.

Table 4 Example mounting dimensions of CRWU···R bed

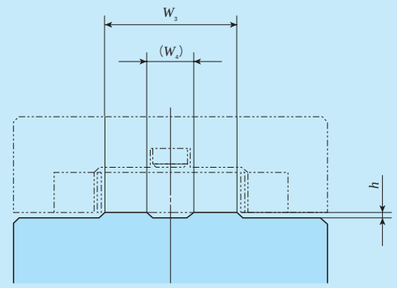


unit: μm


Identification number	h (minimum)	W_3	W_4
CRWU 30 ···R	0.5	13	–
CRWU 40-35R	0.5	18	–
CRWU 40 ···R		13	
CRWU 60 ···R	0.5	26.5	–
CRWU 80 ···R	0.5	38	16
CRWU100 ···R	0.5	42	14
CRWU145 ···R	1.0	68.5	28.5


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

IKO Anti-Creep Cage Crossed Roller Way Unit

Shape	CRWUG
Size	40 / 60 / 80



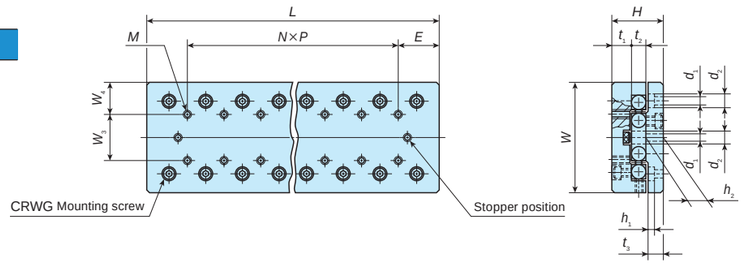


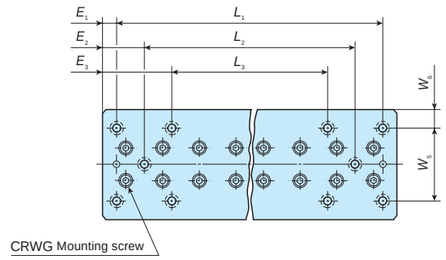


Identification number	Mass (Ref.)	Nominal dimensions and tolerances mm									Table mounting dimensions mm						Bed mounting dimensions mm												Basic dynamic load rating	Basic static load rating	Allowable load	Static moment rating
		W	Dim. W tolerance	H	Dim. H tolerance	L	t_1	t_2	t_3	Maximum stroke length	W_3	W_4	$N\times P$	E	M		W_5	W_6	L_1	E_1	L_2	E_2	L_3	E_3	d_1	d_2	h_1	h_2	C	C_0	F	T_0
	kg																												N	N	N	N·m
CRWUG 40- 35	0.21	40	±0.1	21	±0.1	35	8	6	6.5	18	15	12.5	–	17.5	M3		30	5	25	5.0	–	–	–	–	3.5	6	3.5	7	913	1 180	392	10.6
CRWUG 40- 50	0.30					50	7	8	5.5	30			1×15						40				–	–			3.2	6	2 000	2 440	813	17.7
CRWUG 40- 65	0.36					65				40			2×15						55										2 000	2 440	813	17.7
CRWUG 40- 80	0.47					80				50			3×15						70				40	20					3 430	4 880	1 630	35.3
CRWUG 40- 95	0.53					95				60			4×15						85				55						2 740	3 660	1 220	26.5
CRWUG 40-110	0.63					110				70			5×15						100				70						4 080	6 090	2 030	44.2
CRWUG 40-125	0.70					125				80			6×15						115				85						4 080	6 090	2 030	44.2
CRWUG 60- 55	0.67	60	±0.1	28	±0.1	55	10.5	8	9	30	25	17.5	–	27.5	M4		40	10	35	10.0	–	–	–	–	4.5	7.5	4.5	9.5	2 000	2 440	813	35.3
CRWUG 60- 80	0.99					80				45			1×25						60										3 430	4 880	1 630	70.7
CRWUG 60-105	1.28					105				60			2×25						85				–	–					4 700	7 310	2 440	106
CRWUG 60-130	1.57					130				75			3×25						110										5 300	8 530	2 840	124
CRWUG 60-155	1.86					155				90			4×25						135		85	35							6 440	11 000	3 660	159
CRWUG 80- 85	1.78	80	±0.1	35	±0.1	85	13	11	10.5	50	40	20	–	42.5	M5		60	10	65	10.0	–	–	–	–	5.5	9.5	6	11	5 350	7 050	2 350	145
CRWUG 80-125	2.56					125				75			1×40						80	22.5			–	–					7 960	11 800	3 920	241
CRWUG 80-165	3.34					165				105			2×40						120										9 180	14 100	4 700	289
CRWUG 80-205	4.12					205				135			3×40						160				80	62.5					11 500	18 800	6 270	385

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Shape	CRWU
Size	30 40 60 80 100 145

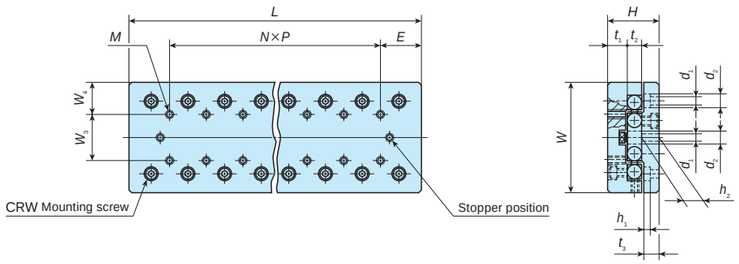


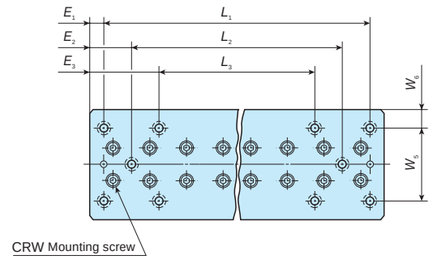


Identification number	Mass (Ref.)	Nominal dimensions and tolerances mm									Table mounting dimensions mm						Bed mounting dimensions mm												Basic dynamic load rating	Basic static load rating	Allowable load	Static moment rating
		W	Dim. W tolerance	H	Dim. H tolerance	L	t_1	t_2	t_3	Maximum stroke length	W_3	W_4	N×P	E	M		W_5	W_6	L_1	E_1	L_2	E_2	L_3	E_3	d_1	d_2	h_1	h_2	C	C_0	F	T_0
	kg																												N	N	N	N·m
CRWU 30- 25	0.09	30	±0.1	17	±0.1	25	7	4	5.5	12	10	10	–	12.5	M2		22	4	18	3.5	–	–	28	13.5	2.55	4.1	2.5	6	380	478	159	3.2
CRWU 30- 35	0.13					35				18			1×10						28				–	–					525	717	239	4.8
CRWU 30- 45	0.17					45				25			2×10						38										659	956	319	6.5
CRWU 30- 55	0.20					55				32			3×10						48				28						786	1 200	398	8.1
CRWU 30- 65	0.24					65				40			4×10						58				38						906	1 430	478	9.7
CRWU 30- 75	0.28					75				45			5×10						68				45						1 020	1 670	558	11.3
CRWU 30- 85	0.32					85				50			6×10						78				58						1 140	1 910	638	12.9
CRWU 40- 35	0.21	40	±0.1	21	±0.1	35	8	6	6.5	18	15	12.5	–	17.5	M3		30	5	25	5	–	–	–	–	3.5	6	3.5	7	896	1 180	392	10.6
CRWU 40- 50	0.30					50	7	8	5.5	30			1×15						40				–	–			3.2	6	2 710	3 660	1 220	26.5
CRWU 40- 65	0.37					65				40			2×15						55										2 710	3 660	1 220	26.5
CRWU 40- 80	0.48					80				50			3×15						70				40	20					4 050	6 090	2 030	44.2
CRWU 40- 95	0.54					95				60			4×15						85				55						3 400	4 880	1 630	35.3
CRWU 40-110	0.65					110				70			5×15						100				70						4 680	7 310	2 440	53.0
CRWU 40-125	0.72					125				80			6×15						115				85						4 680	7 310	2 440	53.0
CRWU 60- 55	0.68	60	±0.1	28	±0.1	55	10.5	8	9	30	25	17.5	–	27.5	M4		40	10	35	10	–	–	–	–	4.5	7.5	4.5	9.5	2 710	3 660	1 220	51.2
CRWU 60- 80	1.0					80				45			1×25						60										4 050	6 090	2 030	85.3
CRWU 60-105	1.3					105				60			2×25						85				–	–					5 270	8 530	2 840	119
CRWU 60-130	1.6					130				75			3×25						110										5 860	9 750	3 250	137
CRWU 60-155	1.9					155				90			4×25						135		85								6 970	12 200	4 060	171
CRWU 60-180	2.2					180				105			5×25						160		110	35							8 040	14 600	4 880	205
CRWU 60-205	2.5					205				130			6×25						185		135		85	60					8 550	15 800	5 280	222

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Shape	CRWU
Size	30 40 60 80 100 145

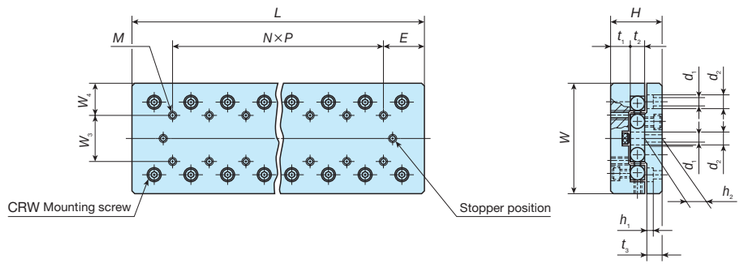

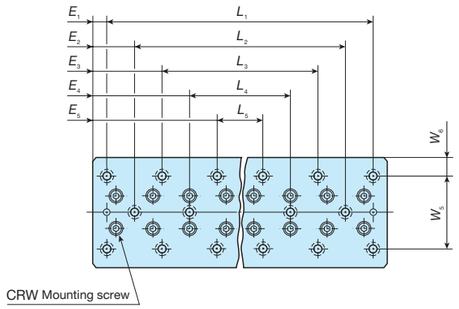



Identification number	Mass (Ref.)	Nominal dimensions and tolerances mm									Table mounting dimensions mm					Bed mounting dimensions mm																Basic dynamic load rating	Basic static load rating	Allowable load	Static moment rating
		W	Dim. W tolerance	H	Dim. H tolerance	L	t_1	t_2	t_3	Maximum stroke length	W_3	W_4	$N\times P$	E	M	W_5	W_6	L_1	E_1	L_2	E_2	L_3	E_3	L_4	E_4	L_5	E_5	d_1	d_2	h_1	h_2	C	C_0	F	T_0
	kg																															N	N	N	N·m
CRWU 80- 85	1.8	80	±0.1	35	±0.1	85	13	11	10.5	50	40	20	–	42.5	M5	60	10	65	10	–	–	–	–	–	–	–	–	5.5	9.5	6	11	6 640	9 400	3 130	188
CRWU 80-125	2.6					125				75			1× 40					80	22.5			–	–	–	–	–	–					9 130	14 100	4 700	282
CRWU 80-165	3.4					165				105			2× 40					120														10 300	16 500	5 480	329
CRWU 80-205	4.2					205				135			3× 40					160		–	–	80	62.5	–	–	–	–					12 500	21 200	7 050	423
CRWU 80-245	5.1					245				155			4× 40					200				120										14 700	25 900	8 620	517
CRWU 80-285	5.9					285				185			5× 40					240				160										16 700	30 600	10 200	611
CRWU 80-325	6.7					325				215			6× 40					280				200				120	102.5					18 700	35 300	11 800	705
CRWU 100-110*	3.6	100	±0.15	45	±0.1	110	16	15	13	60	50	25	–	55	M6	60	20	90	10	–	–	–	–	–	–	–	–	7	11	6.5	14	13 900	18 500	6 150	415
CRWU 100-160*	5.2					160				95			1× 50					140														16 600	23 100	7 690	519
CRWU 100-210*	6.9					210				130			2× 50					190		90	60	–	–									21 600	32 300	10 800	727
CRWU 100-260*	8.5					260				165			3× 50					240		140				–	–	–	–					26 300	41 500	13 800	934
CRWU 100-310*	10.2					310				200			4× 50					290		190												30 800	50 700	16 900	1 140
CRWU 100-360*	11.8					360				235			5× 50					340		240		140	110									35 100	60 000	20 000	1 350
CRWU 100-410*	13.5					410				265			6× 50					390		290		190										37 200	64 600	21 500	1 450
CRWU 145-210*	13.2	145	±0.2	60	±0.1	210	21	22	16	130	85	30	–	105	M8	90	27.5	100	55	–	–	–	–	–	–	–	–	9	14	8.5	17.5	39 400	52 800	17 600	1 900
CRWU 145-310*	19.6					310				180			1×100					200				–	–									61 200	92 300	30 800	3 320
CRWU 145-410*	25.9					410				350			2×100					300		100	155			–	–	–	–					67 900	106 000	35 200	3 800
CRWU 145-510*	32.2					510				450			3×100					400	55	200												74 400	119 000	39 600	4 270
CRWU 145-610*	38.6					610				550			4×100					500		300		100	255									87 100	145 000	48 400	5 220
CRWU 145-710*	45.0					710				650			5×100					600		400		200										99 200	172 000	57 200	6 170
CRWU 145-810*	51.3					810				750			6×100					700		500		300		100	355							111 000	198 000	66 000	7 120

Remark: The identification numbers with * are our semi-standard items.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Shape	CRWU···R
Size	30 40 60 80 100 145

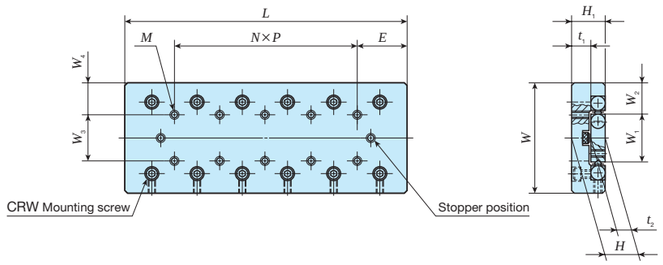

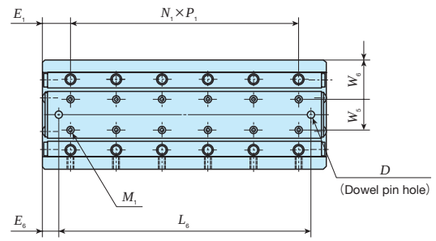



Identification number	Mass (Ref.)	Nominal dimensions and tolerances mm						Table mounting dimensions mm							Center way mounting dimensions and tolerances mm												Basic dynamic load rating	Basic static load rating	Allowable load	Static moment rating
		W	Dim. W tolerance	H	Dim. H tolerance	L	Maximum stroke length	W_3	W_4	N×P	E	M	H_1	t_1	W_5	W_6	$N_1×P_1$	E_1	M_1	D	Dim. D tolerance	L_6	E_6	W_1	W_2	t_2	C	C_0	F	T_0
	kg																										N	N	N	N·m
CRWU 30- 25R	0.06	30	±0.1	11	±0.1	25	12	10	10	–	12.5	M2	11	7	–	15	1×10	7.5	M2	–	–	–	–	12.8	8.6	4	380	478	159	3.2
CRWU 30- 35R	0.08					35	18			1×10							2×10										525	717	239	4.8
CRWU 30- 45R	0.11					45	25			2×10							3×10										659	956	319	6.5
CRWU 30- 55R	0.13					55	32			3×10							4×10			2	+0.020 0	30	12.5				786	1 200	398	8.1
CRWU 30- 65R	0.16					65	40			4×10							5×10					40					906	1 430	478	9.7
CRWU 30- 75R	0.18					75	45			5×10							6×10					50					1 020	1 670	558	11.3
CRWU 30- 85R	0.21					85	50			6×10							7×10					60					1 140	1 910	638	12.9
CRWU 40- 35R	0.13	40	±0.1	14	±0.1	35	18	15	12.5	–	17.5	M3	14	8	–	20	1×15	10	M3	–	–	–	–	17	11.5	6	896	1 180	392	10.6
CRWU 40- 50R	0.21			15		50	30			1×15			15	7			2×15							13.1	13.45	8	2 710	3 660	1 220	26.5
CRWU 40- 65R	0.26					65	40			2×15							2×15	17.5									2 710	3 660	1 220	26.5
CRWU 40- 80R	0.34					80	50			3×15							4×15	10		3	+0.020 0	45	17.5				4 050	6 090	2 030	44.2
CRWU 40- 95R	0.38					95	60			4×15							4×15	17.5				25					3 400	4 880	1 630	35.3
CRWU 40-110R	0.46					110	70			5×15							5×15					60					4 680	7 310	2 440	53.0
CRWU 40-125R	0.50					125	80			6×15							5×15	25					32.5				4 680	7 310	2 440	53.0
CRWU 60- 55R	0.44	60	±0.1	18.5	±0.1	55	30	25	17.5	–	27.5	M4	18.5	10.5	17	21.5	1×25	15	M4	4	+0.020 0	35	10	26.6	16.7	8	2 710	3 660	1 220	51.2
CRWU 60- 80R	0.66					80	45			1×25							2×25					60					4 050	6 090	2 030	85.3
CRWU 60-105R	0.85					105	60			2×25							3×25					85					5 270	8 530	2 840	119
CRWU 60-130R	1.1					130	75			3×25							4×25					110					5 860	9 750	3 250	137
CRWU 60-155R	1.3					155	90			4×25							5×25					135					6 970	12 200	4 060	171
CRWU 60-180R	1.5					180	105			5×25							6×25					160					8 040	14 600	4 880	205
CRWU 60-205R	1.7					205	130			6×25							7×25					185					8 550	15 800	5 280	222


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

IKO Crossed Roller Way Unit

Shape	CRWU···R
Size	30 40 60 80 100 145



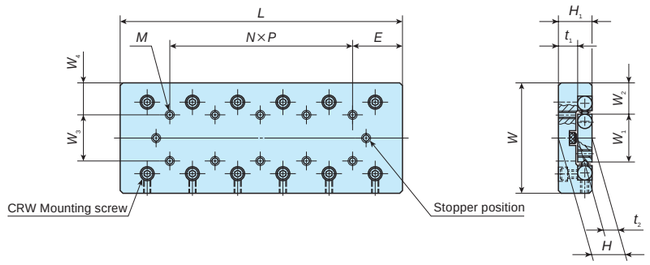

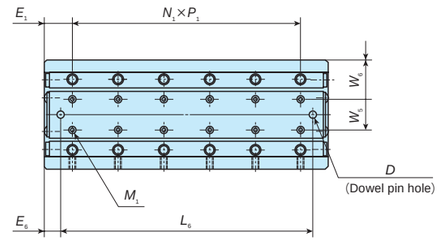



Identification number	Mass (Ref.)	Nominal dimensions and tolerances mm						Table mounting dimensions mm								Center way mounting dimensions and tolerances mm											Basic dynamic load rating	Basic static load rating	Allowable load	Static moment rating
		W	Dim. W tolerance	H	Dim. H tolerance	L	Maximum stroke length	W_3	W_4	N×P	E	M	H_1	t_1		W_5	W_6	$N_1×P_1$	E_1	M_1	D	Dim. D tolerance	L_6	E_6	W_1	W_2	t_2	C	C_0	F	T_0
	kg																										N	N	N	N·m
CRWU 80- 85R	1.2	80	±0.1	24	±0.1	85	50	40	20	–	42.5	M5	24	13		27	26.5	1×40	22.5	M5	5	+0.020 0	55	15	38	21	11	6 640	9 400	3 130	188
CRWU 80-125R	1.8					125	75			1×40								2×40					95					9 130	14 100	4 700	282
CRWU 80-165R	2.3					165	105			2×40								3×40					135					10 300	16 500	5 480	329
CRWU 80-205R	2.9					205	135			3×40								4×40					175					12 500	21 200	7 050	423
CRWU 80-245R	3.5					245	155			4×40								5×40					215					14 700	25 900	8 620	517
CRWU 80-285R	4.0					285	185			5×40								6×40					255					16 700	30 600	10 200	611
CRWU 80-325R	4.6					325	215			6×40								7×40					295					18 700	35 300	11 800	705
CRWU 100-110R*	2.4	100	±0.15	31	±0.1	110	60	50	25	–	55	M6	31	16		26	37	1×50	30	M6	5	+0.020 0	70	20	42	29	15	13 900	18 500	6 150	415
CRWU 100-160R*	3.6					160	95			1×50								2×50					120					16 600	23 100	7 690	519
CRWU 100-210R*	4.7					210	130			2×50								3×50					170					21 600	32 300	10 800	727
CRWU 100-260R*	5.9					260	165			3×50								4×50					220					26 300	41 500	13 800	934
CRWU 100-310R*	7.0					310	200			4×50								5×50					270					30 800	50 700	16 900	1 140
CRWU 100-360R*	8.1					360	235			5×50								6×50					320					35 100	60 000	20 000	1 350
CRWU 100-410R*	9.3					410	265			6×50								7×50					370					37 200	64 600	21 500	1 450
CRWU 145-210R*	9.4	145	±0.2	42.5	±0.1	210	130	85	30	–	105	M8	43	21		46	49.5	1×100	55	M8	5	+0.020 0	150	30	68.4	38.3	21	39 400	52 800	17 600	1 900
CRWU 145-310R*	13.9					310	180			1×100								2×100					250					61 200	92 300	30 800	3 320
CRWU 145-410R*	18.4					410	350			2×100								3×100					350					67 900	106 000	35 200	3 800
CRWU 145-510R*	23.0					510	450			3×100								4×100					450					74 400	119 000	39 600	4 270
CRWU 145-610R*	27.5					610	550			4×100								5×100					550					87 100	145 000	48 400	5 220
CRWU 145-710R*	32.0					710	650			5×100								6×100					650					99 200	172 000	57 200	6 170
CRWU 145-810R*	36.6					810	750			6×100								7×100					750					111 000	198 000	66 000	7 120


Remark: The identification numbers with * are our semi-standard items.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Shape	CRWU···RS		
Size	20	30	40



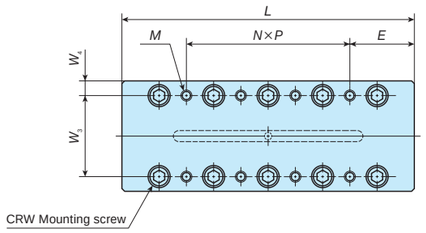





Identification number	Mass (Ref.)	Nominal dimensions and tolerances mm						Table mounting dimensions mm							Center way mounting dimensions mm						Basic dynamic load rating	Basic static load rating	Allowable load	Static moment rating
	kg	W	Dim. W tolerance	H	Dim. H tolerance	L	Maximum stroke length	W_3	W_4	$N\times P$	E		M	H_1	t_1	W_1	W_2	$N_1\times P_1$	E_1	M_1	t_2	C N	C_0 N	F N	T_0 N·m
CRWU 20- 25RS	0.03	20	±0.1	8	±0.1	25	12	14	3	1×18	3.5		M2.5	7.5	3.5	7	6.5	2× 7.5	5	M2.5	4	380	478	159	1.8
CRWU 20- 35RS	0.05					35	18			1×28								2×10	7.5			525	717	239	2.8
CRWU 20- 45RS	0.06					45	25			1×20	12.5							3×10				659	956	319	3.7
CRWU 20- 55RS	0.07					55	32			1×30								4×10				786	1 200	398	4.6
CRWU 30- 65RS	0.20	30	±0.1	12	±0.1	65	40	22	4	1×30	17.5		M3	11.5	5.5	12	9	3×15	10	M3	6	1 850	2 940	979	19.1
CRWU 30- 80RS	0.24					80	50			1×45								4×15				2 130	3 530	1 180	22.9
CRWU 30- 95RS	0.29					95	60			2×30								5×15				2 410	4 110	1 370	26.7
CRWU 40-105RS	0.58	40	±0.1	16	±0.1	105	60	30	5	1×50	27.5		M4	15.5	7.5	16	12	3×25	15	M4	8	4 680	7 310	2 440	63.6
CRWU 40-130RS	0.72					130	75			1×75								4×25				5 860	9 750	3 250	84.8
CRWU 40-155RS	0.85					155	90			2×50								5×25				6 970	12 200	4 060	106

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch


Linear Slide Unit

High Rigidity Precision Linear Slide Unit
Precision Linear Slide Unit
Linear Slide Unit



High Rigidity Precision Linear Slide Unit

BWU

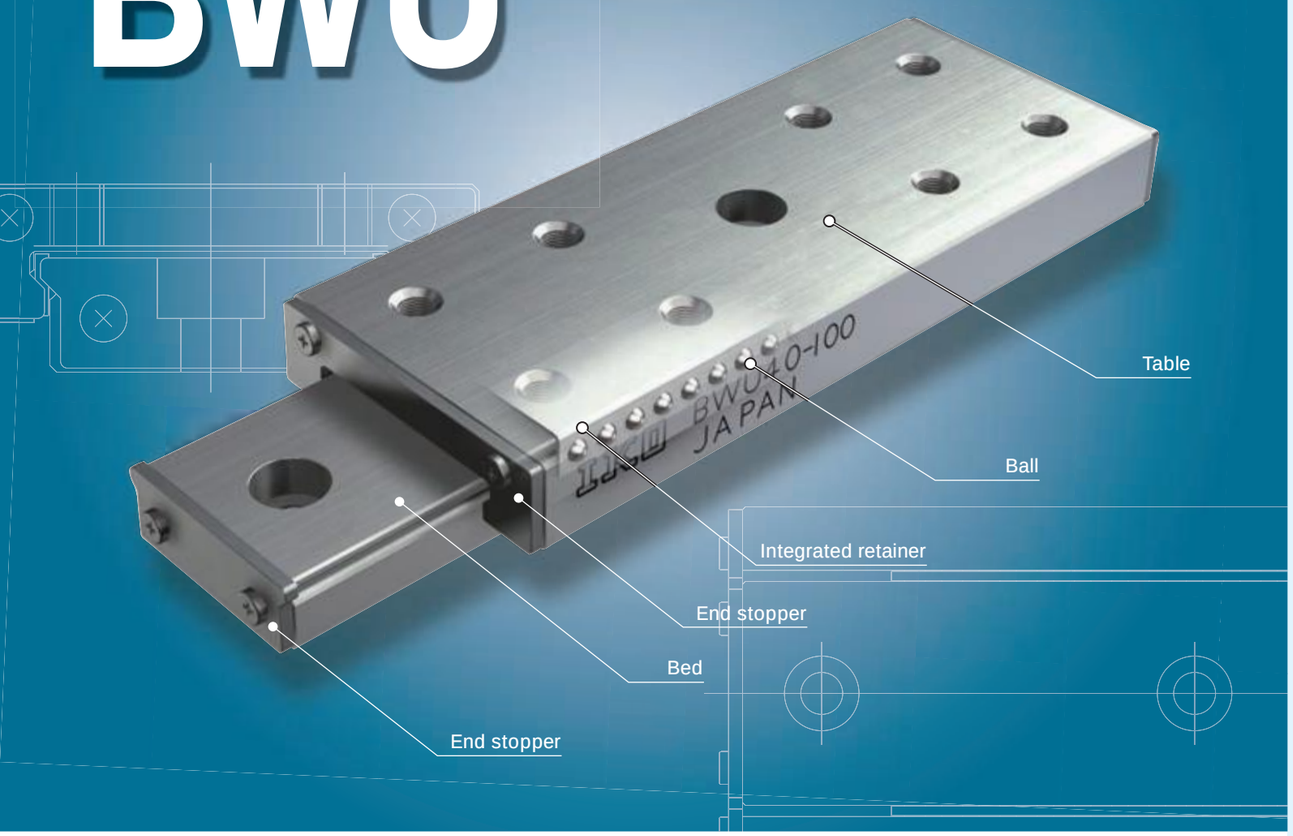

Points

1 Simple limited linear motion guide structure

Small and simple limited stroke type structure incorporated with balls and retainer between integrated table and bed. With two-row four-point contact structure, stable accuracy and rigidity can be achieved even in applications where fluctuating load and complex load are applied.

2 High accuracy

Simultaneous grinding process of two-row track grooves is applied to table and bed, which provides small processing errors and realizes linear motion of high accuracy.

3 Smooth operations

As each component is finished with accuracy without recirculation resistance of the balls, light and smooth operations are obtained.


4 Stainless steel selections for excellent corrosion resistance

Stainless steel highly resistant to corrosion is used for all steel components, so that they are suitable for applications where rust prevention oil is not preferred, such as in a cleanroom environment.

Identification Number and Specification

Example of an identification number

The specification of BWU series is indicated by the identification number. Indicate the identification number, consisting of a model code and dimensions for each specification to apply.

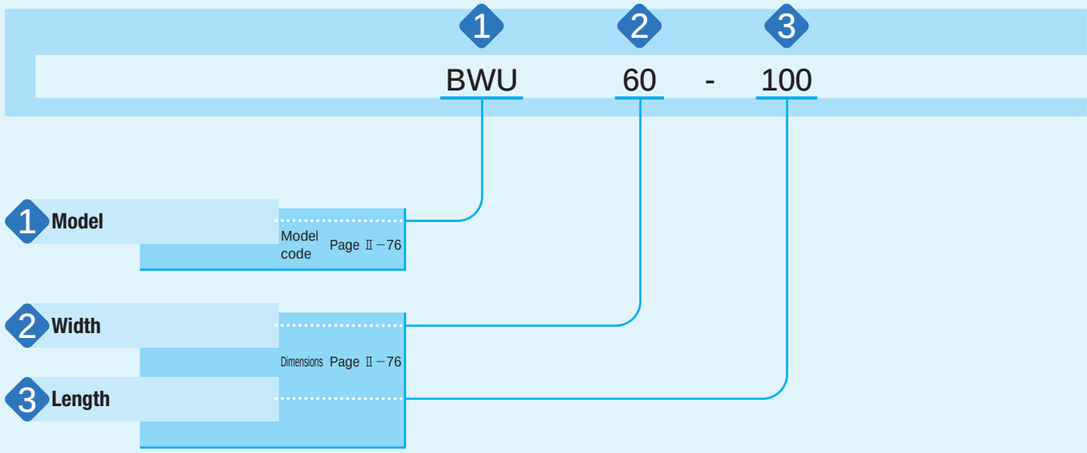

Details of Identification Number and Specification

1 Model

High Rigidity Precision Linear Slide Unit (BWU series) : BWU

For applicable models, width and length, see Table 1.

2 Width

6, 8, 10, 12, 17, 25, 30, 40, 60


Indicate the table width in mm.
For applicable models, width and length, see Table 1.

3 Length

Indicate the table length in mm.
For applicable models, width and length, see Table 1.

Table 1 Width and length of BWU series

unit: mm

Shape	Model	Width	Length											
			10	15	20	25	30	40	45	60	75	80	90	100	120
	BWU	6	○	–	○	–	○	–	–	–	–	–	–	–	–
		8	○	–	○	–	○	–	–	–	–	–	–	–	–
		10	–	○	–	○	–	○	–	–	–	–	–	–	–
		12	–	–	○	–	○	–	○	–	–	–	–	–	–
		17	–	–	○	–	○	–	○	–	–	–	–	–	–
		25	–	–	–	–	○	–	○	○	○	–	–	–	–
		30	–	–	–	–	○	–	○	○	○	–	○	–	–
		40	–	–	–	–	–	○	–	○	–	○	–	○	–
		60	–	–	–	–	–	–	–	○	–	○	–	○	○

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch


Allowable Load

Allowable load refers to load of smooth rolling motion on contact surface to which maximum contact stress is applied and the sum of whose elastic deformation of rolling elements and raceway is small.
Therefore, use applied load within the allowable load range if very smooth rolling motion and high accuracy are required.

Load Direction and Load Rating

The BWU series must be used with its load rating corrected in accordance to the load direction. The basic dynamic load rating and basic static load rating shown in the dimension table should be corrected to values in Table 2.

Table 2 Load ratings corrected for load direction




Load rating and load direction / Width	Basic dynamic load rating			Basic static load rating		
	Load direction			Load direction		
	Downward	Upward	Lateral	Downward	Upward	Lateral
6～60	C	C	1.19C	C_0	C_0	1.19C_0

Accuracy

Accuracy of the BWU series is indicated in Table 3 and Table 4.

Table 3 Accuracy



unit: mm

Item	Tolerance and allowance
Dim. H tolerance	±0.040
Dim. N tolerance	±0.050
Parallelism at the table center	See Table 4
Parallelism on the table side	See Table 4

Table 4 Running accuracy unit: μm

Nominal length L mm		Parallelism at the table center (1)	Parallelism on the table side (2)
Above	Below		
–	50	4	6
50	80	5	8
80	120	6	9

Notes (1) Parallelism at the center of the table represents parallelism of height when the table is stroked.
(2) Parallelism at the side of the table represents parallelism of the side (the opposite side of IKO mark) when the table is stroked.

Preload

Preload for the BWU series is adjusted to proper preload state.

Lubrication

Grease is not pre-packed in the BWU series, so please perform adequate lubrication as needed.
Upon delivery, anti-rust oil is applied. Therefore, perform cleaning with clean solution before mounting and apply high-quality lubrication oil or grease before use. For grease lubrication, use of high-quality lithium-soap base grease is recommended.
Since no grease nipple or oil hole is provided, apply grease directly to the raceway part of the bed when supplying the grease.

Dust Protection

No dust protection seal is provided for BWU series. For applications in other than clean environment, cover the entire unit with a protective case, etc. to prevent harmful foreign substances such as dust and particles from outside from entering.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Precaution for Use

❶ Handling

When high running accuracy is required, set the load point at the center of the table (or bed) and use with sufficient stroke length.

For the BWU series, the retainer may be deviated from the right position due to offset load or irregular and high-velocity motion, etc. Fully stroke it once in certain operating time or certain number of reciprocating motion to correct the retainer position.

Since there is no built-in mechanical stopper to regulate linear motion to regulate linear motion, install a stopper mechanism in proximity if risk of overstroke exists.

The fixing thread depth of mounting screws for table must not exceed the maximum fixing thread depth indicated in the table of dimensions. Since the mounting screw hole for the table is penetrated, the bed or retainer will be pushed by the screw if the fixing thread depth is too deep, and the running accuracy and life may be adversely affected.

❷ Maximum operating temperature

As synthetic resin components are not used for the BWU series, it may be used at high temperature. However, when it exceeds 100°C, contact IKO.

❸ Maximum velocity

Operating velocity should not exceed 30 m/min during operation.

Precaution for Mounting

❶ Reference mounting surface

Reference mounting surface of the BWU series is the opposite side of the IKO mark. (See Fig. 1)

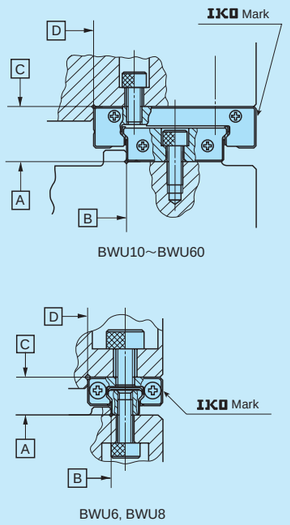



Fig. 1 Reference mounting surface and mounting examples

❷ Typical mounting structure

As indicated in Fig.1, reference mounting surfaces B and D, and mounting surfaces A and C are precisely ground. Therefore, by machining the reference mounting surface of the mating member and the mounting surface, such as machine or device, to high accuracy and mounting them properly, stable linear motion with high accuracy is realized.

For the opposite corner of the mating reference mounting, it is recommended to have relieved fillet as indicated in the illustration in Table 5. The value indicated in Table 5 is recommended for the shoulder height on the mating side.

Table 5 Shoulder height



unit: mm

Width	Shoulder height of the table side h_1	Shoulder height of the bed side h_2
6	1	0.5
8	1.2	0.8
10	1.2	0.8
12	1.5	0.8
17	2.5	1.2
25	2.5	1.5
30	3	2
40	3	2.5
60	4	2.5

❸ When lateral load is the primary load

As indicated in Fig. 2, firmly fix the sides of the table and bed with pressure plates.

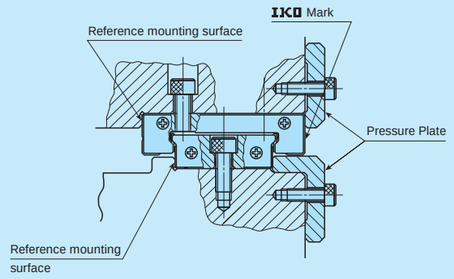


Fig. 2 Mounting example when lateral load is the primary load

❹ Tightening torque for fixing screw

Typical tightening torque for mounting of the BWU series to the steel mating member material is indicated in Table 6. If the mating member material is cast iron or aluminum, reduce the tightening torque depending on the strength characteristic of the mating member material.


Table 6 Tightening torque for fixing screw


Bolt size	Tightening torque N · m
M1 ×0.25	0.04
M1.4×0.3	0.10
M1.6×0.35	0.15
M2 ×0.4	0.31
M3 ×0.5	1.1
M4 ×0.7	2.5

Remark: The calculation is based on the tightening torque of stainless steel hexagon socket head bolt, property division A2-70.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Shape	BWU
Size	6 · 8 · 10 · 12 · 17 · 25 · 30 · 40 · 60

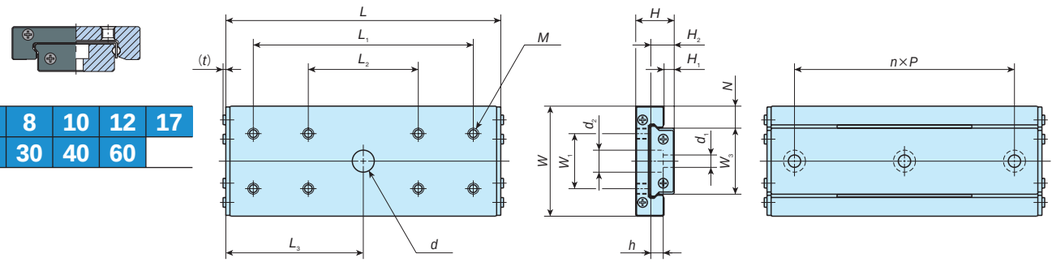

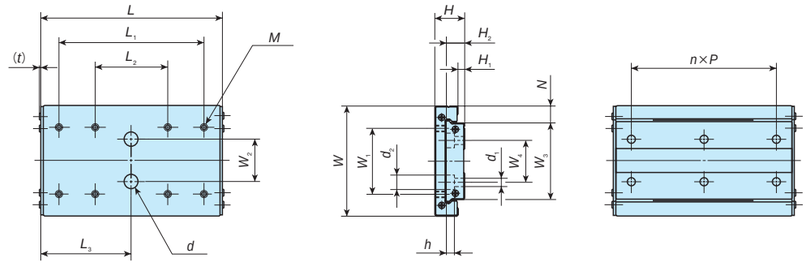

BWU60-100, BWU60-120

Identification number	Mass (Ref.)	Nominal dimensions mm						Table mounting dimensions mm									Bed mounting dimensions mm								Basic dynamic load rating	Basic static load rating	Allowable load	Static moment rating
	g	W	H	H_1	N	L	Maximum stroke length	W_1	L_1	L_2	M	Maximum fixing thread depth	W_2		L_3	d	t	W_3	H_2	W_4	n	P	d_1	d_2	h	C	C_0	F	T_0
																										N	N	N	N·m
BWU 6- 10	1.0	6	3.2	0.7	2	10	3	–	4	–	M1.4	0.8	–		–	–	0.46	2	1.9	–	1	4	M1.0 Through	–	–	154	181	60.2	0.21
BWU 6- 20	2.2					20	11		10													8				252	361	120	0.42
BWU 6- 30	3.3					30	16		18	10											2					355	587	196	0.68
BWU 8- 10	1.7	8	4	1	2.5	10	4	–	5.5	–	M2	0.8	–		–	–	0.45	3	2.6	–	1	5	M1.6 Through	–	–	203	212	70.6	0.36
BWU 8- 20	3.5					20	16		10													10				292	353	118	0.60
BWU 8- 30	5.2					30	20		21	10											2					442	635	212	1.1
BWU 10- 15	3.2	10	4	1	3	15	8	–	6.5	–	M2	0.8	–		7.5	3	0.45	4	2.6	–	1	5	1.8	2.8	0.75	249	282	94.1	0.62
BWU 10- 25	5.7					25	16		13						–	–						10				370	494	165	1.1
BWU 10- 40	9.0					40	22		26	13					20	3					3					572	917	306	2.0
BWU 12- 20(1)	6.2	12	4.5	1	3	20	16	–	8	–	M2	1.1	–		–	–	0.45	6	2.8	–	1	7.5	2.4	4	1.5	292	353	118	1.1
BWU 12- 30(1)	9.5					30	20		15													15				442	635	212	2.0
BWU 12- 45(1)	14.1					45	30		31	15					22.5	4.5					2					603	988	329	3.2
BWU 17- 20	15.0	17	8	1.5	5	20	14	12	10	–	M2	3	–		10	4.5	0.8	7	5	–	1	7.5	2.4	4.2	2.3	588	635	212	2.5
BWU 17- 30	23.7					30	19		20						–	–						15				874	1 110	370	4.4
BWU 17- 45	35.4					45	29		30						22.5	4.5					2					1 200	1 750	582	6.9
BWU 25- 30	40.6	25	9	1.8	5.5	30	23	10	15	–	M3	2.5	–		–	–	0.9	14	5.2	–	1	15	3.5	6	3.2	783	953	318	7.1
BWU 25- 45	62.5					45	28		25													30				1 200	1 750	582	13.0
BWU 25- 60	84.3					60	38																			1 490	2 380	794	17.7
BWU 25- 75	104					75	48		55	25					37.5	6.5					2					1 760	3 020	1 010	22.5
BWU 30- 30	64.4	30	12	3.4	6	30	23	14	15	–	M3	3	–		–	–	1.0	18	7.5	–	1	15	3.5	6.5	4.5	1 270	1 410	470	13.4
BWU 30- 45	99.1					45	29		25													30				1 920	2 540	847	24.1
BWU 30- 60	133					60	35																			2 490	3 670	1 220	34.9
BWU 30- 75	165					75	47		55	25					37.5	6.5					2					2 880	4 520	1 510	42.9
BWU 30- 90	199					90	59								45											3 250	5 360	1 790	50.9
BWU 40- 40	136	40	14	3.5	8	40	31	20	20	–	M4	4	–		–	–	1.0	24	8.5	–	1	20	4.5	8	4.5	2 040	2 210	735	27.8
BWU 40- 60	209					60	39		40													40				3 100	3 970	1 320	50.0
BWU 40- 80	281					80	47																			4 010	5 730	1 910	72.2
BWU 40-100	346					100	63		80	40					50	8					2					4 640	7 060	2 350	88.9
BWU 60- 60	363	60	16	3.6	9	60	34	36	40	–	M4	4	–		–	–	1.1	42	10	23	1	40	4.5	8	4.5	4 740	5 690	1 900	124
BWU 60- 80	487					80	45																			5 930	7 820	2 610	171
BWU 60-100	597					100	56		80	40			23		50	8					2					7 020	9 960	3 320	217
BWU 60-120	723					120	68		100						60											8 050	12 100	4 030	264

Note (1) Dedicated bed mounting bolts (cross recessed head screw for precision equipment M2×4) are provided for BWU12.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch


Precision Linear Slide Unit

Limited linear motion type

BSP

Built-in rack & pinion type

BSPG

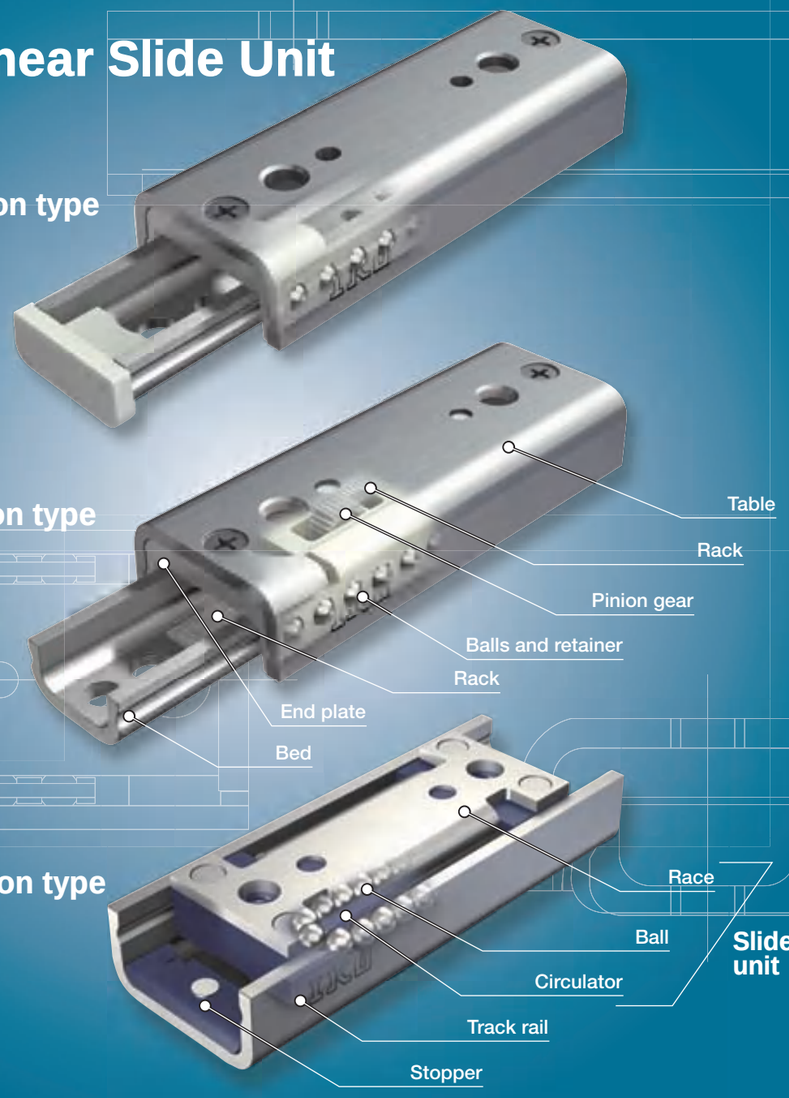

Endless linear motion type

BSR

Points

● Light weight and compact

1 Weight is saved by precise forming of stainless steel plate to U shape and integration of the way and mounting surface, and downsizing was realized by functional allocation of parts.

● Stable performance

2 With simple two-row four-point contact structure, motion accuracy with stable load carrying capacity and high motion accuracy can be achieved for load in every direction.

● Quiet and smooth operations

3 The excellent retaining and guiding mechanism of the ball and precisely-finished raceway realizes very quiet and smooth operations. High response characteristics and positioning accuracy are obtained for micro-feeding operation as well.

● High safety

4 Since non-combustible or self-extinguishing materials are used for all synthetic resin components, they may be used for wide range of applications including household office automation equipment that requires incombustibility.

● Stainless steel selections for excellent corrosion resistance

5 Stainless steel highly resistant to corrosion is used for all steel components, so that they are suitable for applications where rust prevention oil is not preferred, such as in a cleanroom environment.

Identification Number and Specification

Example of an identification number

The specifications of BSP, BSPG and BSR are indicated by the identification number. Indicate the identification number, consisting of a model code, dimensions, a material code, and a clearance code for each specification to apply.

1	2	3	4	5
BSP	15	50	SL	T1
BSPG	12	35	SL	T1
BSR	20	60	SL	T1

1 Model — Model code Page Ⅱ－85

2 Width

3 Length — Dimensions Page Ⅱ－85

4 Material type — Material code Page Ⅱ－85

5 Clearance amount — Clearance code Page Ⅱ－85

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Details of Identification Number and Specification

1 Model

Precision Linear Slide Unit

Limited linear motion type	: BSP
Built-in rack & pinion type	: BSPG
Endless linear motion type	: BSR




For applicable models and width, see Table 1.

2 Width

7, 10, 12, 15, 20, 25

Indicate the width in mm.
For applicable models and width, see Table 1.

Table 1 Models and width

Shape	Model	Characteristics	Width					
			7	10	12	15	20	25
Limited linear motion type 	BSP	Retainer made of special synthetic resin is used to prevent interference noise from contact of balls. This type performs very smooth and light limited linear motion without stick-slip.	○	○	–	○	○	○
Built-in rack & pinion type 	BSPG	A pinion gear assembled in the retainer integrated with two-row ball raceway is engaged with the racks fixed to the table and bed to prevent creeping of retainer position. Like BSP, this type also performs smooth linear motion.	–	–	○	○	○	○
Endless linear motion type 	BSR	The ball circulation structure made of special synthetic resin realizes quiet and smooth endless linear motion according to the length of a track rail.	–	–	○	○	○	○

3 Length

Indicate the length in mm.

4 Material type

Stainless steel made : SL

Stainless steel (SL) can be specified only for the material type.

5 Clearance amount

Standard	: No symbol
T_1Clearance	: T_1


For details of clearance amount, see Table 2.
Typically, apply the standard clearance for use in small frictional resistance and the clearance adjusted to the clearance code T_1 for applications requiring high linear motion accuracy.

Table 2 Clearance of raceways unit: μm

Type and code	Clearance of raceways
Standard (no symbol)	0 ～ +4
T_1	−4 ～ 0

Accuracy


Table 3 Running accuracy for BSP and BSPG



unit: μm

Stroke length mm Above	Stroke length mm Below	Parallelism at the bed center against the table mounting surface Δ_1	Parallelism at the bed center against the table reference mounting surface Δ_2
–	18	3	6
18	30	4	8
30	50	5	10
50	80	6	12

Table 4 Running accuracy for BSR



unit: μm

Stroke length mm Above	Stroke length mm Below	Parallelism at the slide unit center against the track rail mounting surface Δ_1	Parallelism at the slide unit center against the track rail reference mounting surface Δ_2
–	18	3	6
18	30	4	8
30	50	5	10
50	80	6	12

Lubrication

Grease is not pre-packed in the BSP and BSR, so please perform adequate lubrication as needed.
Upon delivery, anti-rust oil is applied. Therefore, perform cleaning with clean solution before mounting, apply high-quality lubrication oil or grease to the raceway, and conduct shakedown before use.
The BSPG is packed with special grease applied to the raceway and rack and pinion. In general applications, keep cleanliness and mount it as it is.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Precaution for Use

❶ Applied load
For use with stable and high running accuracy, it is recommended to use applied load around 20% or lower of the basic static load rating.

❷ Handling
When high running accuracy is required for BSP and BSPG, set the load point at the center of the table (or bed) and use with sufficient stroke length.
For the BSP, the retainer may be deviated from the right position due to offset load or irregular and high-velocity motion, etc. Fully stroke it once in certain operating time or certain number of reciprocating motion to correct the retainer position. If it is difficult to correct the retainer position, use BSPG or BSR.
Since BSP, BSPG and BSR have no built-in mechanical stopper to regulate linear motion, install a stopper mechanism in proximity if risk of overstroke exists.

❸ Maximum operating temperature
The maximum operating temperature is 120°C and temperature up to 100°C is allowed for continuous operation. However, when it exceeds 100°C, contact IKO.

❹ Maximum velocity
Operating velocity should not exceed 30 m/min during operation.

Precaution for Mounting

❶ Reference mounting surface
Reference mounting surface is the opposite side of the IKO mark.


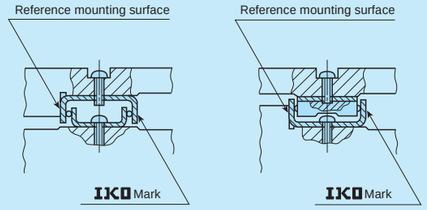


Fig. 1 Reference mounting surface

❷ Typical mounting structure
The mating surface to mount BSP, BSPG and BSR should be finished to high accuracy as much as possible so as not to affect the motion accuracy.
For the opposite corner of the mating reference mounting, it is recommended to have relieved fillet as indicated in Fig. 1, but you may also mount it based on R_1 dimension indicated in Table 5. The value indicated in Table 5 is recommended for the shoulder height on the mating side.

❸ Mounting
The fixing thread depth of fixing screws must not exceed the maximum fixing thread depth indicated in the dimension table.
When mounting BSP and BSPG, use female screws of the table and bed, or insert screws smaller by one size to the female screws. However, note that BSP 715 SL through BSP 740 SL cannot be mounted from the inside of the table and bed.
When mounting the track rail of BSR, use female screws of the track rail or insert screws smaller by one size to the female screws. However, note that BSR 1530 SL through BSR 2040 SL cannot be mounted from the inside of the track rail. In addition, when BSR 1230 SL through BSR 1260 SL are to be mounted from the inside of the track rail, contact IKO.

Table 5 Shoulder height and corner radius of the reference mounting surface

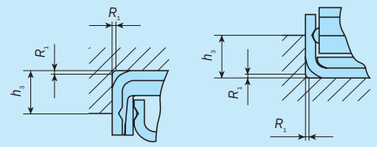

unit: mm

Identification number			Shoulder height h_3	Corner radius R_1 (maximum)
–	–	BSR 12	2.5	0.5
BSP 7	–	–	3	
BSP 10	–	–	4	
–	BSPG 12	–		
BSP 15	BSPG 15	BSR 15	5	
BSP 20	BSPG 20	BSR 20	6	
BSP 25	BSPG 25	BSR 25		

❹ Tightening torque for fixing screw
If the fixing force of BSP, BSPG and BSR toward the mating surface is too strong, performance and accuracy are adversely affected. Although it depends on material, rigidity and finishing condition of the mating surface, it is generally recommended to use smaller tightening torque for fixing screws and use value comparable to Table 6. In addition, use a stopper measure such as adhesive agent if fixing screw may be loosened by vibration, etc.


Table 6 Tightening torque for fixing screw

Bolt size	Tightening torque N · m
M2 × 0.4	0.064
M2.3 × 0.4	0.10
M2.6 × 0.45	0.15
M3 × 0.5	0.23

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Limited linear motion type

Shape: **BSP**



Size: 7 | 10 | 15 | 20 | 25




Identification number	Mass (Ref.)	Nominal dimensions mm				Table mounting dimensions mm						Bed mounting dimensions mm						Basic dynamic load rating	Basic static load rating
		W	H	L	Maximum stroke length	L_1	M_1	Maximum fixing thread depth s_1		h_1	t_1	w	L_2	M_2	Maximum fixing thread depth s_2	h_2	t_2	C	C_0
	g																	N	N
BSP 7 15 SL(1)	2.1	7	4	15	9	5	M2	1		3.4	0.9	3.6	5	M2	2	–	2	93.3	42.0
BSP 7 20 SL(1)	2.8			20		10							10					134	70.0
BSP 7 30 SL(1)	4.2			30	18	20							20					170	98.0
BSP 7 40 SL(1)	5.6			40	23	30							30					203	126
BSP 10 25 SL	6.2	10	6	25	15	15	M2.6	1.5		5.8	1.1	6.2	15	M2.6	2.7	3.7	2.7	340	156
BSP 10 35 SL	8.8			35	26	25							25					398	194
BSP 10 45 SL	11.3			45	38	35							35					453	233
BSP 15 30 SL	11	15	8	30	22	14	M3	2.5		7	1.2	11.2	14	M3	3	4.5	1.2	395	194
BSP 15 40 SL	14.7			40	24	24							24					550	311
BSP 15 50 SL	18.4			50	32	34							34					644	389
BSP 15 60 SL	22.1			60	40	40							40					732	467
BSP 20 40 SL	23.7	20	10	40	22	24	M3	3.2		9	1.4	16	24	M3	3.5	6.2	1.4	726	386
BSP 20 50 SL	29.7			50	28	34							34					866	496
BSP 20 60 SL	35.7			60	34	40							40					998	606
BSP 20 70 SL	41.7			70	40	45							45					1 120	717
BSP 20 80 SL	47.6			80	53	50							50					1 180	772
BSP 25 50 SL	37.6	25	10	50	26	34	M3	3.5		9	1.6	20.5	34	M3	3	5.7	1.6	866	496
BSP 25 60 SL	45.3			60	32	40							40					998	606
BSP 25 70 SL	52.9			70	40	45							45					1 120	717
BSP 25 80 SL	60.5			80	51	50							50					1 180	772
BSP 25 100 SL	75.8			100	63	60							60					1 410	992

Note (1) BSP 715 SL through BSP 740 SL cannot be mounted from the inside of the table and bed.


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch


Built-in rack & pinion type

Shape: **BSPG**



Size: 12 | 15 | 20 | 25

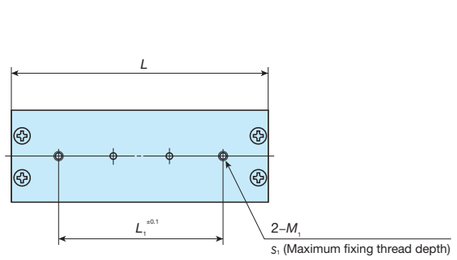

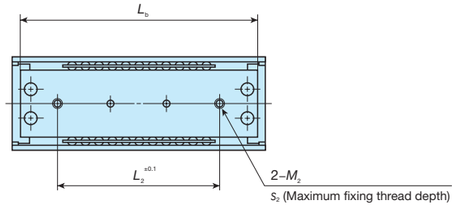


Identification number	Mass (Ref.)	Nominal dimensions mm				Table mounting dimensions mm						Bed mounting dimensions mm							Basic dynamic load rating	Basic static load rating
		W	H	L	Maximum stroke length	L_1	M_1	Maximum fixing thread depth s_1	h_1		t_1	L_b	w	L_2	M_2	Maximum fixing thread depth s_2	h_2	t_2	C	C_0
	g																		N	N
BSPG 12 25 SL	6.5	12	6	25	14	15	M2.6	2	5.2		1.2	23.6	7.6	15	M2.6	2	3	1	244	131
BSPG 12 35 SL	9.0			35	24	24						33.6		24					299	175
BSPG 12 45 SL	11.6			45	34	34						43.6		34					350	219
BSPG 15 40 SL	15.8	15	8	40	24	24	M3	2.5	7		1.2	37	9.6	24	M3	3	4.5	1.2	550	311
BSPG 15 50 SL	19.6			50	32	34						47		34					644	389
BSPG 15 60 SL	23.5			60	40	40						57		40					732	467
BSPG 20 40 SL	25.5	20	10	40	22	24	M3	3.2	9		1.4	37	13.8	24	M3	3.5	6.2	1.4	726	386
BSPG 20 50 SL	31.8			50	28	34						47		34					866	496
BSPG 20 60 SL	38.1			60	34	40						57		40					998	606
BSPG 20 70 SL	44.4			70	40	45						67		45					1 120	717
BSPG 20 80 SL	50.5			80	47	50						77		50					1 240	827
BSPG 25 50 SL	40.3	25	10	50	26	34	M3	3.5	9		1.6	46	18.4	34	M3	3	5.7	1.6	866	496
BSPG 25 60 SL	48.3			60	32	40						56		40					998	606
BSPG 25 70 SL	56.2			70	38	45						66		45					1 120	717
BSPG 25 80 SL	64.1			80	44	50						76		50					1 240	827
BSPG 25 100 SL	80.0			100	56	60						96		60					1 460	1 050


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch


Endless linear motion type

Shape: **BSR**



Size: 12 | 15 | 20 | 25

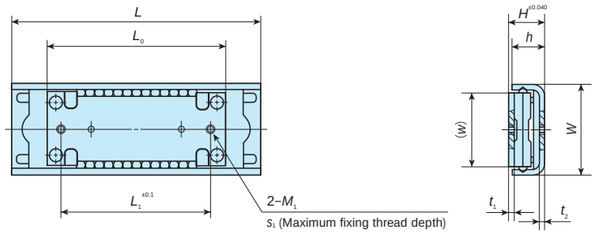

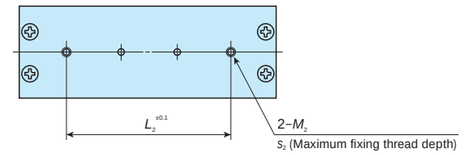


Identification number	Mass (Ref.) g	Nominal dimensions mm W	H	L	Maximum stroke length	Slide Unit mm w	L_0	L_1	Mounting dimensions M_1	Maximum fixing thread depth s_1	t_1	Track rail mounting dimensions mm L_2	M_2	Maximum fixing thread depth s_2	h	t_2	Basic dynamic load rating C N	Basic static load rating C_0 N
BSR 12 30 SL(1)	5.8	12	4.5	30	13	9.8	21.5	15	M2	1.3	0.9	15	M2	1.6	4	0.9	214	140
BSR 12 40 SL(1)	7.0			40	23							20						
BSR 12 50 SL(1)	8.2			50	33							34						
BSR 12 60 SL(1)	9.3			60	43							40						
BSR 15 30 SL(2)	12.6	15	8	30	10	12.2	30	24	M3	1.8	1	14	M3	3	7	1.2	543	311
BSR 15 40 SL	14.8			40	20							24						
BSR 15 50 SL	17.1			50	30							34						
BSR 15 60 SL	19.3			60	40							40						
BSR 20 40 SL(2)	27.6	20	10	40	12	16.8	40	32	M3	2.2	1.4	24	M3	3.5	9	1.4	921	551
BSR 20 50 SL	31.1			50	22							34						
BSR 20 60 SL	34.6			60	32							40						
BSR 20 70 SL	38.1			70	42							45						
BSR 20 80 SL	41.6			80	52							50						
BSR 25 70 SL	53.8	25	10	70	33	21.4	50	42	M3	2.4	1.6	45	M3	3.5	9	1.6	1 170	772
BSR 25 80 SL	58.4			80	43							50						
BSR 25 100 SL	67.4			100	63							60						

Notes (1) When BSR 1230 SL through BSR 1260 SL are to be mounted from the inside of the track rail, contact IKO.
(2) BSR 1530 SL through BSR 2040 SL cannot be mounted from the inside of the track rail.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Linear Slide Unit

BSU···A

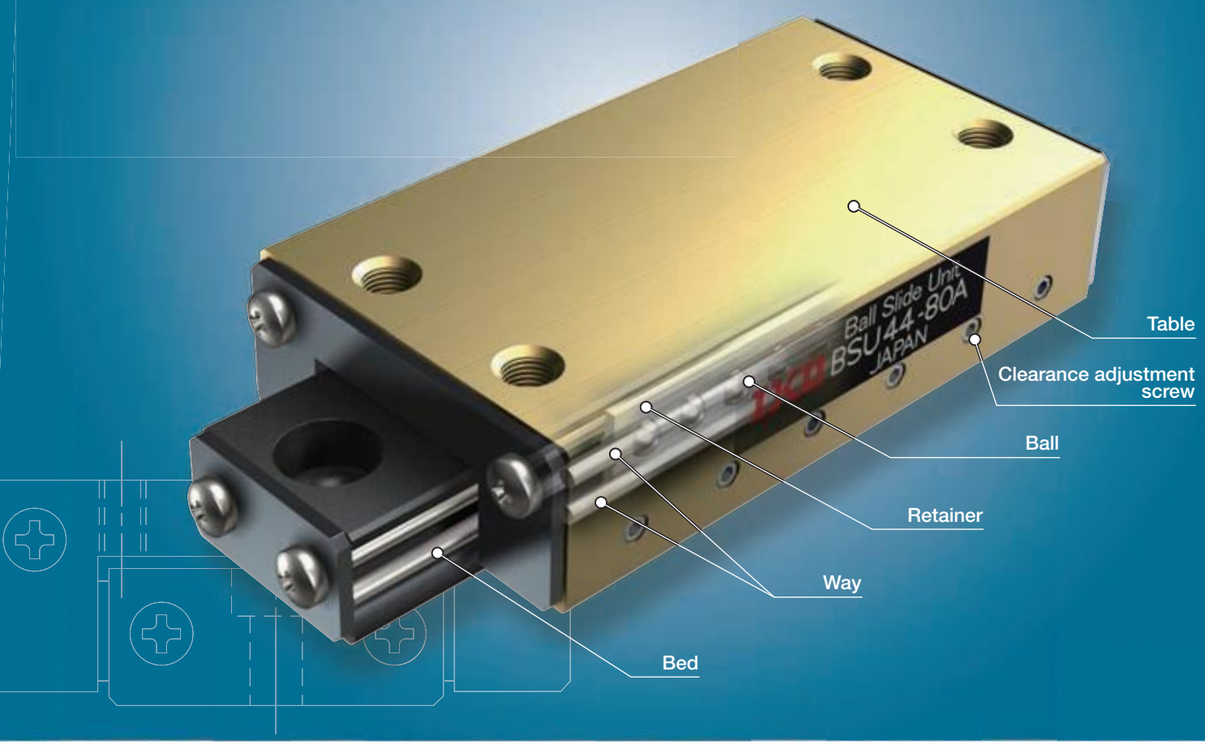

Points

Light weight linear motion guide unit

1

Since the product uses aluminum alloy for table and bed, it is a light weight and compact limited linear motion guide unit.

Easy mounting

3

Since the product is properly preloaded, it can easily gain a stable linear motion only by fixing it against precisely grounded mounting surface with bolts.

Smooth operations

2

Since the ball is guided by the retainer made of synthetic resin and rotates on high accuracy round shank way, it can obtain a light and smooth motion.

Excellent corrosion resistance


4

The ball and way are mode of stainless steel and the surface of table and bed have anodic oxidization coating, allowing high corrosion resistance.

Identification Number and Specification

Example of an identification number

The specification of BSU···A series is indicated by the identification number. Indicate the identification number, consisting of a model code and dimensions for each specification to apply.

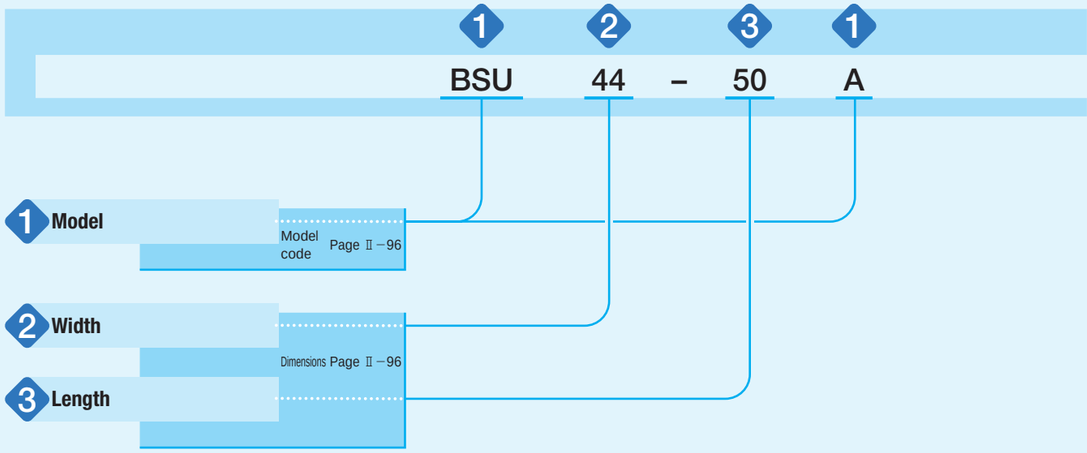

Details of Identification Number and Specification

1 Model

Linear Slide Unit : BSU···A

For applicable models, width and length, see Table 1.

2 Width

44, 66


Indicate the table width in mm.
For applicable models, width and length, see Table 1.

3 Length

Indicate the length in mm.
For applicable models, width and length, see Table 1.

Table 1 Width and length of BSU···A series

unit: mm

Shape	Model	Width	Length				
			50	80	100	125	150
	BSU···A	44	○	○	○	–	–
		66	–	–	○	○	○

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Allowable Load

Allowable load refers to load of smooth rolling motion on contact surface to which maximum contact stress is applied and the sum of whose elastic deformation of rolling elements and raceway is small.




Fig.1 Direction of allowable load

Accuracy

❶ Running accuracy

Parallelism at the table center against the bed mounting surface (see Fig. 2): 10 μm / 10 mm




Fig.2 Parallelism at the table center

❷ Allowance of deviation at the table center

Deviation at the table center after stroking the table and returning to the same position (see Fig. 3.): 1.5 μm




Fig.3 Deviation at the table center

Lubrication

Grease is not pre-packed in the BSU···A series, so perform adequate lubrication as needed.
Perform cleaning with clean solution before mounting and apply high-quality lubrication oil or grease to the raceway before use.

Precaution for Use

❶ Handling

When high running accuracy is required, set the load point at the center of the table (or bed) and use with sufficient stroke length.
For the BSU···A series, the retainer may be deviated from the right position due to offset load or irregular and high-velocity motion, etc. Fully stroke it once in certain operating time or certain number of reciprocating motion to correct the retainer position.
Since BSU···A series have small allowable load F, handling requires special care. Especially when clearance adjustment is performed, too much tightening of clearance adjustment screw will create impression on ball or way, which can adversely affect the friction, noise and vibration of the bearing. When performing clearance adjustment, gradually rotate the clearance adjustment screw by checking the motion status and paying special attention.

❷ Operating temperature

The table and bed of BSU···A series are made of aluminum alloy, and the clearance may change by the operating temperature. When using in the temperature outside the normal temperature, contact **IKO**. When using in wide operating temperature range, it is recommended to use **IKO** High Rigidity Precision Linear Slide Unit.

❸ Maximum velocity

Operating velocity should not exceed 30 m/min during operation.

Precaution for Mounting

❶ Mounting

The fixing thread depth of fixing screws must not exceed the maximum fixing thread depth indicated in the dimension table. Since the fixing screw hole for the table is penetrated, the bed or retainer will be pushed by the screw if the fixing thread depth is too deep, and the running accuracy and life may be adversely affected.

❷ Tightening torque for fixing screw


Typical tightening torque for mounting of the BSU···A series to the steel mating member material is indicated in Table 2. If the mating member material is cast iron or aluminum, reduce the tightening torque depending on the strength characteristic of the mating member material.


Table 2 Tightening torque for fixing screw


Bolt size	Tightening torque N · m
M5×0.8	5.0

Remark: The calculation is based on the tightening torque of stainless steel hexagon socket head bolt, property division A2-70.

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Shape	BSU···A	
		
Size	44	66





Identification number	Mass (Ref.)	Nominal dimensions mm				Table mounting dimensions mm				Bed mounting dimensions mm						Allowable load
		H	W	L	Stroke length	W_1	L_1		M×depth	W_2	t	L_2	d_1	d_2	h	F
	g															N
BSU 44- 50 A	110	20	44	50	25	20	35		M5×7	21.8	12.3	35	5.3	10	5.3	98.1
BSU 44- 80 A	175			80	50		65					65				177
BSU 44-100 A	220			100	75		85					85				235
BSU 66-100 A	420	25	66	100	50	35	75		M5×8	37	16	75	5.3	10	5.3	265
BSU 66-125 A	525			125	75		100					100				392
BSU 66-150 A	625			150	100		125					125				510

1N=0.102kgf=0.2248lbs.
1mm=0.03937inch